

*Indian Standard*

METHODS OF TEST FOR AUTOCLAVED  
CELLULAR CONCRETE PRODUCTS

**PART IV CORROSION PROTECTION OF STEEL  
REINFORCEMENT IN AUTOCLAVED CELLULAR CONCRETE**

( Third Reprint JULY 1990 )

UDC 666.973.6:691.87[669.14]:620.193

© *Copyright* 1972

**BUREAU OF INDIAN STANDARDS**  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

# Indian Standard

## METHODS OF TEST FOR AUTOCLAVED CELLULAR CONCRETE PRODUCTS

### PART IV CORROSION PROTECTION OF STEEL REINFORCEMENT IN AUTOCLAVED CELLULAR CONCRETE

Cement and Concrete Sectional Committee, BDC 2

<i>Chairman</i>	<i>Representing</i>
DR H. C. VISVESVARAYA	Cement Research Institute of India, New Delhi
<i>Members</i>	
DR A. S. BHADURI	National Test House, Calcutta
SHRI E. K. RAMACHANDRAN ( <i>Alternate</i> )	Central Building Research Institute (CSIR), Roorkee
SHRI A. K. CHATTERJI	Central Road Research Institute (CSIR), New Delhi
DR S. S. REHSI ( <i>Alternate</i> )	Central Water & Power Commission, New Delhi
DIRECTOR	Alokudyog Services Ltd, New Delhi
DR R. K. GHOSH ( <i>Alternate</i> )	Indian Roads Congress, New Delhi
DIRECTOR (CSMRS)	Associated Cement Companies Ltd, Bombay
DEPUTY DIRECTOR (CSMRS) ( <i>Alternate</i> )	Research, Designs & Standards Organization Lucknow
SHRI K. C. GHOSAL	
SHRI A. K. BISWAS ( <i>Alternate</i> )	
DR R. K. GHOSH	
DR R. R. HATTIANGADI	
SHRI P. J. JAGU ( <i>Alternate</i> )	
JOINT DIRECTOR, STANDARDS (B & S)	
DEPUTY DIRECTOR, STANDARDS (B & S) ( <i>Alternate</i> )	
SHRI S. B. JOSHI	S. B. Joshi & Co Ltd, Bombay
SHRI M. T. KANSE	Directorate General of Supplies & Disposals Roads Wing, Ministry of Transport & Shipping
SHRI KARTIK PRASAD	
SHRI S. L. KATHURIA ( <i>Alternate</i> )	M. N. Dastur & Co (Private) Ltd, Calcutta
SHRI S. R. KULKARNI	Concrete Association of India, Bombay
SHRI M. A. MEHTA	Central Public Works Department
SHRI O. MUTHACHEN	
SUPERINTENDING ENGINEER, 2ND CIRCLE ( <i>Alternate</i> )	
SHRI ERACH A. NADIRSHAH	Institution of Engineers (India), Calcutta
SHRI K. K. NAMBIAR	In personal capacity ('Ramanalaya', 11 First Crescent Park Road, Gandhinagar, Adyar, Madras)

(Continued on page 2)

( Continued from page 1 )

<i>Members</i>	<i>Representing</i>
BRIG NARESH PRASAD COL J. M. TOLANI ( <i>Alternate</i> ) PROF G. S. RAMASWAMY	Engineer-in-Chief's Branch, Army Headquarters Structural Engineering Research Centre ( CSIR ), Roorkee
DR N. S. BHAL ( <i>Alternate</i> ) DR A. V. R. RAO SHRI RAVINDER LAL ( <i>Alternate</i> )	National Buildings Organization, New Delhi
SHRI G. S. M. RAO SHRI T. N. S. RAO SHRI S. R. PINHEIRO ( <i>Alternate</i> )	Geological Survey of India, Nagpur Gammon India Ltd, Bombay Central Board of Irrigation & Power, New Delhi Irrigation & Power Research Institute, Amritsar
SECRETARY SHRI R. P. SHARMA SHRI MOHINDER SINGH ( <i>Alternate</i> )	
SHRI G. B. SINGH SHRI C. L. KASLIWAL ( <i>Alternate</i> )	Hindustan Housing Factory Ltd, New Delhi
SHRI J. S. SINGHOTA SHRI A. M. SINGAL ( <i>Alternate</i> )	Beas Designs Organization, Nangal Township
SHRI K. A. SUBRAMANIAM SHRI T. S. RAMACHANDRAN ( <i>Alternate</i> )	India Cements Ltd, Madras
SHRI L. SWAROOP SHRI A. V. RAMANA ( <i>Alternate</i> )	Dalmia Cement ( Bharat ) Ltd, New Delhi
SHRI D. AJITHA SIMHA, Director ( Civ Engg )	Director General, ISI ( <i>Ex-officio Member</i> )

*Secretary*SHRI Y. R. TANEJA  
Deputy Director ( Civ Engg ), ISI**Precast Concrete Products Subcommittee, BDC 2 : 9***Convener*SHRI M. A. MEHTA  
Concrete Association of India, Bombay*Members*SHRI E. T. ANFIA ( *Alternate to*  
Shri M. A. Mehta )  
SHRI V. A. ARTHANOUR  
SHRI T. RAMACHANDRAN ( *Alternate* )  
SHRI H. B. CHATTERJEE  
SHRI S. K. CHATTERJEE  
DEPUTY DIRECTOR, STANDARDS  
( B & S )  
ASSISTANT DIRECTOR, STANDARDS  
( M/C ) ( *Alternate* )  
DIRECTOR ( CSMRS )  
DEPUTY DIRECTOR ( CSMRS ) ( *Alternate* )

Neyveli Lignite Corporation Ltd, Neyveli

Hindustan Block Manufacturing Co Ltd, Calcutta

Hindustan Housing Factory Ltd, New Delhi

Research, Designs & Standards Organization,  
Lucknow

Central Water &amp; Power Commission, New Delhi

( Continued on page 7 )

*Indian Standard***METHODS OF TEST FOR AUTOCLAVED  
CELLULAR CONCRETE PRODUCTS****PART IV CORROSION PROTECTION OF STEEL  
REINFORCEMENT IN AUTOCLAVED CELLULAR CONCRETE****0. FOREWORD**

**0.1** This Indian Standard ( Part IV ) was adopted by the Indian Standards Institution on 21 February 1972, after the draft finalized by the Cement and Concrete Sectional Committee had been approved by the Civil Engineering Division Council.

**0.2** Autoclaved cellular concrete is a class of material, which has been developed commercially abroad and is in the process of development in this country also. A series of Indian Standards on cellular concrete is being formulated so as to provide guidance in obtaining reliable products in autoclaved cellular concrete. The Sectional Committee has considered it desirable to issue a standard for the methods of test for autoclaved cellular concrete products for the guidance of manufacturers and users.

**0.3** In the formulation of this standard due weightage has been given to international co-ordination among the standards and practices prevailing in different countries in addition to relating it to the practices in the field in this country.

**0.4** For convenience of reference, 'Indian Standard methods of test for autoclaved cellular concrete products' has been grouped into the following nine parts:

- |          |   |
|----------|---|
| Part I   | Determination of unit weight or bulk density and moisture content                                     |
| Part II  | Determination of drying shrinkage   |
| Part III | Determination of thermal conductivity   |
| Part IV  | Corrosion protection of steel reinforcement in autoclaved cellular concrete                           |
| Part V   | Determination of compressive strength   |
| Part VI  | Strength, deformation and cracking of flexural members subject to bending-short duration loading test |
| Part VII | Strength, deformation and cracking of flexural members subject to bending-sustained loading test      |

Part VIII Loading tests for flexural members in diagonal tension

Part IX Jointing of autoclaved cellular concrete elements

0.5 In reporting the result of a test made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS : 2 - 1960\*.

## 1. SCOPE

1.1 This standard ( Part IV ) covers the method for determining the effectiveness of corrosion protection of the reinforcement bars embedded in autoclaved cellular concrete. In this method of test the effectiveness of corrosion protection of reinforcement bars is determined by exposure of samples to humid conditions at two widely different temperatures alternatively. The method is an accelerated test for corrosion under conditions, which are as close as possible to those experienced in practice.

## 2. TEST SPECIMENS

2.1 **Location of Specimens** --- Three test specimens shall be cut from a complete element of the autoclaved cellular concrete product taken from the current production after exposure to the designed load. The specimens shall preferably be evenly distributed over the whole width of the element; the position of the test specimens is illustrated in Fig. 1.


2.2 **Shape and Size of Test Specimens** — The test specimens shall be  $40 \times 40 \times 150$  mm prisms with the steel bar positioned centrally in the prisms. The specimens shall be prepared by careful sawing. The end faces ( $40 \times 40$  mm) of the prisms shall be coated with a moisture and vapour barrier, such as cold asphalt or bitumen emulsion layer coated with a layer of melted asphalt.

2.3 **Reference Samples** — For each of the test specimen there shall be a reference specimen of the same size as the test specimen and cut from the same reinforcement bar and from a position adjacent to the test specimen ( see Fig. 1 ). Thus there shall be three test specimens, cut and treated as in 2.1 and 2.2 and three corresponding reference specimens. For reference samples, the concrete around the steel bar and the protective coating on the surface of the bar shall be crushed and removed until the whole surface of the steel bar can be visually inspected and classified according to 4.1.

## 3. TESTING EQUIPMENT

3.1 Climatic cabinet where the specimens can be exposed to moisture-saturated air ( relative humidity  $90 \pm 5$  percent ) at temperatures alternating every 3 h between  $25 \pm 5^\circ\text{C}$  and  $55 \pm 5^\circ\text{C}$ , with warming-up period of one hour for each temperature.

\*Rules for rounding off numerical values ( revised ).

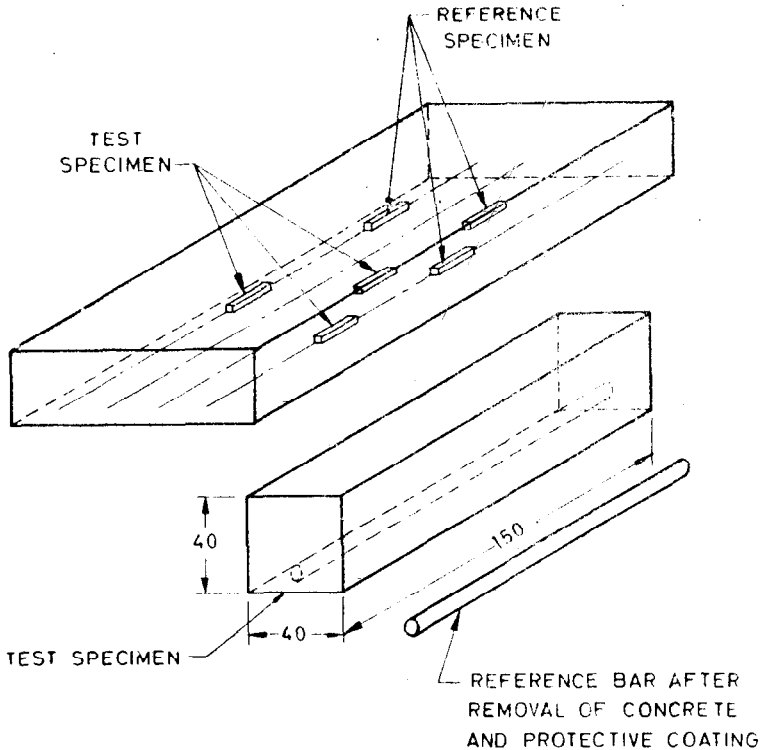

All dimensions in millimetres.

FIG. 1 TEST SPECIMENS AND REFERENCE SPECIMENS FOR CORROSION PROTECTION OF STEEL REINFORCEMENT

#### 4. PROCEDURE

**4.1 Inspection of Reference Samples** — Immediately after preparation of the reference samples, the whole surface of the steel bars shall be examined from all sides and the amount of rust present on the surface noted.

**4.2 Rust Exposure of Test Specimens** — The three test specimens shall be placed in the humidity cabinet and exposed to moisture-saturated air at  $25 \pm 5^\circ\text{C}$  and  $55 \pm 5^\circ\text{C}$ . Every 24 h the specimens shall be exposed to four cycles with each cycle consisting of 3 h at  $25 \pm 5^\circ\text{C}$  and 3 h at  $55 \pm 5^\circ\text{C}$ .

**4.2.1** After 28 days exposure of the specimens in the humidity cabinet, the cellular concrete material around the reinforcement bars and coating on the bars shall be removed, and the surface of the bars examined in the same fashion in which the reference samples have been examined.

**4.3 Assessing Corrosion** -- The corrosion (or the efficacy of rust protecting agent) of test specimen bars shall be estimated by comparing with reinforcement bars of corresponding reference specimens. When the assessment is made the bars shall be rotated around their longitudinal axis so that the entire surface is checked. If reinforcing bars of the test specimens are free from rust or show only slight rust (not rust flakes) distributed uniformly over the bars and do not occupy more than 5 percent of its surface, the rust protecting agent is considered satisfactory.

## **5. REPORT**

**5.1** The report shall include the following information:

- a) Code designation;
- b) Place, time and method of sampling; and
- c) Percentage of rust formation.

( Continued from page 2 )

<i>Members</i>	<i>Representing</i>
SHRI K. C. GHOSAL	Alokudyog Services Ltd, New Delhi
SHRI A. K. BISWAS ( <i>Alternate</i> )	
SHRI M. K. GUPTA	Himalayan Tiles & Marble Pvt Ltd, Bombay
SHRI B. D. JAYARAMAN	State Housing Board, Madras
SHRI B. K. JINDAL	Central Building Research Institute ( CSIR ), Roorkee
DR S. S. REHSI ( <i>Alternate</i> )	
SHRI L. C. LAI	In personal capacity ( B/17, West End, New Delhi 23 )
SHRI G. C. MATHUR	National Buildings Organization, New Delhi
ASSISTANT DIRECTOR ( DESIGNS ) ( <i>Alternate</i> )	
SHRI S. NAHARAY	Engineering Construction Corporation Ltd, Madras
SHRI A. RAMAKRISHNA ( <i>Alternate</i> )	
SHRI K. K. NAMBIAR	In personal capacity ( ' Ramanalaya ', 11 First Crescent Park Road, Gandhinagar, Adyar, Madras )
SHRI RADHEY SHAM	Engineer-in-Chief's Branch, Army Headquarters
SHRI B. G. SHIRKE	B. G. Shirke & Co, Poona
SHRI R. A. DESHMUKH ( <i>Alternate</i> )	
SHRI C. N. SRINIVASAN	C. R. Narayana Rao, Madras
SHRI C. N. RAGHAVENDRAN ( <i>Alternate</i> )	
SURVEYOR OF WORKS ( I )	Central Public Works Department
DR H. C. VISVESVARAYA	Cement Research Institute of India, New Delhi



# BUREAU OF INDIAN STANDARDS

## Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones: 331 01 31, 331 13 75

Telegrams: Manaksanstha  
( Common to all Offices )

## Regional Offices:

	Telephone
Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002	{ 331 01 31 331 13 75
*Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola, CALCUTTA 700054	36 24 99
Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036	{ 2 18 43 3 16 41
Southern : C. I. T. Campus, MADRAS 600113	{ 41 24 42 41 25 19 41 29 16
†Western : Manakalaya, E9 MIDC, Marol, Andheri ( East ), BOMBAY 400093	6 32 92 95

## Branch Offices:

'Pushpak', Nurmohamed Shaikh Marg, Khanpur, AHMADABAD 380001	{ 2 63 48 2 63 49
‡Peenya Industrial Area 1st Stage, Bangalore Tumkur Road BANGALORE 560058	{ 38 49 55 38 49 56
Gangotri Complex, 5th Floor, Bhadbhada Road, T. T. Nagar, BHOPAL 462003	6 67 16
Plot No. 82/83, Lewis Road, BHUBANESHWAR 751002	5 36 27
53/5 Ward No. 29, R.G. Barua Road, 5th Byelane, GUWAHATI 781003	3 31 77
5-8-56C L. N. Gupta Marg ( Nampally Station Road ), HYDERABAD 500001	23 10 83
R14 Yudhister Marg, C Scheme, JAIPUR 302005	{ 6 34 71 6 98 32
117/418 B Sarvodaya Nagar, KANPUR 208005	{ 21 68 76 21 82 92
Patliputra Industrial Estate, PATNA 800013	6 23 05
T.C. No. 14/1421, University P.O., Palayam TRIVANDRUM 695035	{ 6 21 04 6 21 17

## Inspection Offices ( With Sale Point ):

Pushpanjali, First Floor, 205-A West High Court Road, Shankar Nagar Square, NAGPUR 440010	2 51 71
Institution of Engineers ( India ) Building, 1332 Shivaji Nagar, PUNE 411005	5 24 35

\*Sales Office in Calcutta is at 5 Chowringhee Approach, P. O. Princep Street, Calcutta 700072

†Sales Office in Bombay is at Novelty Chambers, Grant Road, 89 65 28  
Bombay 400007

‡Sales Office in Bangalore is at Unity Building, Narasimharaja Square, 22 36 71  
Bangalore 560002