

IS : 2720 (Part XII) - 1981
(Reaffirmed 1997)

Indian Standard

METHODS OF TEST FOR SOILS

**PART XII DETERMINATION OF SHEAR STRENGTH
PARAMETERS OF SOIL FROM CONSOLIDATED
UNDRAINED TRIAXIAL COMPRESSION TEST WITH
MEASUREMENT OF PORE WATER PRESSURE**

(First Revision)

Second Reprint DECEMBER 1998

UDC 624'131'439'5 : 624'131'536

© *Copyright* 1982

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

Indian Standard

METHODS OF TEST FOR SOILS

PART XII DETERMINATION OF SHEAR STRENGTH PARAMETERS OF SOIL FROM CONSOLIDATED UNDRAINED TRIAXIAL COMPRESSION TEST WITH MEASUREMENT OF PORE WATER PRESSURE

(*First Revision*)

Soil Engineering and Rock Mechanics Sectional Committee, BDC 23

Chairman

DR JAGDISH NARAIN

Representing

University of Roorkee, Roorkee

Members

ADDITIONAL DIRECTOR, IRI

Irrigation Department, Government of Bihar,
Patna

ADDITIONAL DIRECTOR RESEARCH
(F. E.), RDSO

Ministry of Railways

DEPUTY DIRECTOR RESEARCH

(SOIL-MECH), RDSO (*Alternate*)

PROF ALAM SINGH

University of Jodhpur, Jodhpur

SHRI P. D. AGARWAL

Public Works Department, Government of Uttar
Pradesh, Lucknow

DR B. L. DHAWAN (*Alternate*)

COL AVTAR SINGH

Engineer-in-Chief's Branch, Army Headquarters

LT-COL V. K. KANITKAR (*Alternate*)

CHIEF ENGINEER (D & R)

Irrigation Department, Government of Punjab,
Chandigarh

DR G. S. DHILLON (*Alternate*)

SHRI M. C. DANDAVATE

The Concrete Association of India, Bombay

SHRI N. C. DUGGAL (*Alternate*)

(*Continued on page 2*)

© *Copyright* 1982

BUREAU OF INDIAN STANDARDS

This publication is protected under the *Indian Copyright Act* (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an *infringement* of copyright under the said act.

IS : 2720 (Part XII) - 1981

(Continued from page 1)

Members

SHRI A. G. DASTIDAR

DR G. S. DHILLON
DIRECTOR, IRI

SHRI A. H. DIVANJI

SHRI A. N. JANGLE (*Alternate*)

DR GOPAL RAJAN
DR GOPAL RANJAN
SHRI S. GUPTA

SHRI N. V. DE SOUSA (*Alternate*)

SHRI G. S. JAIN

SHRI VIJAY K. JAIN (*Alternate*)

SHRI A. B. JOSHI

DEPUTY DIRECTOR (CSMRS) (*Alternate*)

COL M. V. KAYERKAR

SHRI V. B. GHORPADE (*Alternate*)

SHRI O. P. MALHOTRA

SHRI D. R. NARAHARI

SHRI B. G. RAO (*Alternate*)

SHRI T. K. NATRAJAN

DR G. V. RAO

DR K. K. GUPTA (*Alternate*)

RESEARCH OFFICER (B & RRL)

SHRI K. R. SAXENA

SECRETARY

DEPUTY SECRETARY (*Alternate*)

SHRI N. SIVAGURU

SHRI D. V. SIKKA (*Alternate*)

SHRI K. S. SRINIVASAN

SHRI SUNIL BERRY (*Alternate*)

SHRI N. SUBRAMANYAM

SUPERINTENDING ENGINEER
(P & DC)

EXECUTIVE ENGINEER (SMRD)
(*Alternate*)

SHRI G. RAMAN,

Director (Civ Engg)

Representing

In personal capacity (5 Hungerford Street, 12/1
Hungerford Court, Calcutta-700017)

Indian Geotechnical Society, New Delhi
Irrigation Department, Government of Uttar
Pradesh, Lucknow

Asia Foundations and Construction (P) Ltd,
Bombay

Institution of Engineers (India), Calcutta
University of Roorkee, Roorkee
Cemindia Co Ltd, Bombay

G. S. Jain & Associates, Roorkee

Central Water Commission, New Delhi

Ministry of Defence (R & D)

Public Works Department, Chandigarh Adminis-
tration, Chandigarh
Central Building Research Institute (CSIR),
Roorkee

Central Road Research Institute (CSIR),
New Delhi

Indian Institute of Technology, New Delhi

Public Works Department, Government of Punjab,
Chandigarh

Engineering Research Laboratories, Government
of Andhra Pradesh, Hyderabad

Central Board of Irrigation & Power, New Delhi

Roads Wing (Ministry of Shipping and
Transport)

National Buildings Organization, New Delhi

Karnataka Engineering Research Station,
Krishanarajasagar

Public Works Department, Government of Tamil
Nadu, Madras

Director General, ISI (*Ex-officio Member*)

Secretary

SHRI K. M. MATHUR

Deputy Director (Civ Engg), ISI

(Continued on page 39)

Indian Standard

METHODS OF TEST FOR SOILS

PART XII DETERMINATION OF SHEAR STRENGTH PARAMETERS OF SOIL FROM CONSOLIDATED UNDRAINED TRIAXIAL COMPRESSION TEST WITH MEASUREMENT OF PORE WATER PRESSURE

(First Revision)

0. FOREWORD

0.1 This Indian Standard was adopted by the Indian Standards Institution on 24 December 1981, after the draft finalized by the Soil Engineering and Rock Mechanics Sectional Committee had been approved by the Civil Engineering Division Council.

0.2 This standard (Part XII) was first published in 1975. Based on the experience gained in the use of this standard in the past five years, this Part has been revised. The principal modifications being made are in regard to permitting the other types of apparatus also which meet the basic requirements given in the standard and also other sizes of specimen.

0.3 In reporting the results of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS : 2-1960*

1. SCOPE

1.1 This standard (Part XII) lays down the method of determining the shear strength parameters of saturated soils from triaxial compression shear tests conducted under consolidated undrained conditions with measurements of pore water pressures. It also describes a procedure.

1.2 The test is limited to specimens in the form of right cylinders of nominal diameter 38, 50, 70 or 100 mm with height twice its diameter. The ratio of diameter of the sample to the maximum size of the particle in the soil shall not be less than five.

*Rules for rounding off numerical values (*revised*).

2. TERMINOLOGY

2.1 For the purpose of this standard the terminology given in IS : 2809-1972* shall apply.

3. APPARATUS

3.1 For conducting the \overline{CU} test, the testing system consists of the following five major functional components:

- a) A system to house the sample, that is, a triaxial cell;
- b) A system to apply cell pressure and maintain it at a constant magnitude;
- c) A system to apply additional axial stress;
- d) A system to measure pore water pressure; and
- e) A system to measure changes of volume of the soil sample.

3.2 Any of the apparatus which can achieve the five functions listed above can be used. One of the suggested variety of the apparatus and the alternate variety suitable are given below. The general set up of apparatus is given in Fig. 1.

<i>Functional Component</i> (see 3.1)	<i>Suggested Variety</i>	<i>Alternate Variety</i>
a)	A triaxial cell with two valves providing access to cell and two to pedestal. Operation of valves shall not produce a change of volume in the lines in which the valves exist. The cell has one air vent and one oil inlet. It has a stainless steel loading ram running in a lapped or honed bush lubricated with oil. The triaxial cell considered can be subjected to a maximum pressure of 10 kgf/cm ²	Variation in number of valves and vents acceptable. Triaxial cells with higher pressure capacity may be used. The bush through which the loading ram passes should not have a 'O' ring seal which will increase the ram friction

*Glossary of terms and symbols relating to soil engineering (first revision).

- | | | |
|----|---|--|
| b) | Self compensating mercury pot system able to keep pressure at a constant level with a variation of less than 0.01 kgf/cm ² | Any system employing air or hydraulic pressure so long as it can be maintained at a constant level with a precision of ± 0.01 kgf/cm ² |
| c) | Loading frame able to subject soil sample to axial deformation at constant rates in the range from 0.50 to 0.02 mm/min | Any device to effect incremental loading for conducting tests under stress control conditions |
| d) | Mechanical null indicator system able to measure pore water pressure with an accuracy of 0.01 kgf/cm ² | i) Electrical null systems
ii) Pressure transducers actuated by insignificantly little flow of water

The system shall be such as to measure pore water pressure with an accuracy of 0.01 kgf/cm ² |
| e) | Burette of 10 ml capacity with a least count of 0.05 ml | Burette of larger capacity but with a least count of at least 0.05 ml |


3.3 The details of the suggested variety except the loading frame and its accessories are shown in Fig. 1. The details of the alternate varieties will depend on their types.

3.4 Components — The suggested variety shall consist of the components given in 3.4.1 to 3.4.14. The components of the other varieties will depend upon their types.

3.4.1 *The Triaxial Cell* — See (11) to (25) in Fig. 1.

3.4.2 *A System to Fill Water in Cell* — See (7), (I) and (II) in Fig. 1. The water reservoir (7) can be filled with de-aired water by connecting lead (1) to a vacuum pump and lead (11) to a sump of de-aired water with valves *W1* and *W2* open and valves *G1*, *G2* and *G3* closed. After reservoir (7) is filled, disconnect vacuum pump from lead (1). For filling cell with water open valves *W1*, *G2*, *C3* and *C2* and air vent (12) and keep all other valves closed.

3.4.3 *A System to Apply Cell Pressure and Maintain it at Constant Pressure* — See (1) to (6) in Fig. 1. With valves *M2* and *M3* closed and valves *M1*, *C3* and *C2* open, cell pressure can be applied on account of the difference in elevation of the level of mercury in the top movable mercury

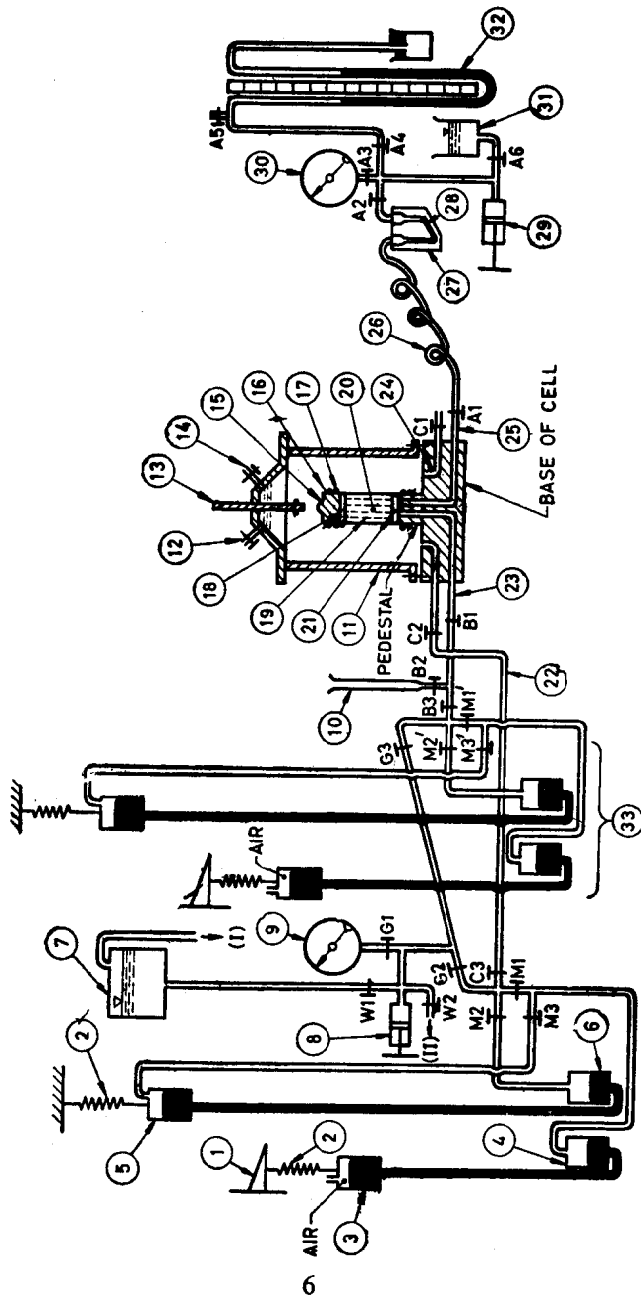

- (1) Movable bracket
- (2) Spring with specified spring constant
- (3) Top movable mercury pot
- (4) Bottom mercury pot connected to the top movable mercury pot
- (5) Top fixed mercury pot
- (6) Bottom mercury pot connected to the top fixed mercury pot
- (7) Reservoir of deaired water
- (8) Screw control cylinder
- (9) Pressure gauge
- (10) Burette
- (11) Triaxial cell
- (12) Air vent
- (13) Loading ram
- (14) Oil inlet
- (15) Loading cap
- (16) Rubber membrane
- (17) Rubber "O" rings
- (18) Coarse porous stone
- (19) Filter paper strips
- (20) Soil sample

- (21) Coarse porous stone
- (22) Cell pressure line
- (23) Drainage and back pressure line
- (24) Top drainage line
- (25) Pore pressure measurement line
- (26) Non-expansive tube (annealed tube)
- (27) Null indicator
- (28) Mercury
- (29) Screw control cylinder
- (30) Pressure gauge
- (31) Reservoir of deaired water
- (32) Manometer
- (33) System to apply back pressure
 - (I) Connection to vacuum pump
 - (II) Connection to deaired water sump

VALVES

- | | |
|------------------------|-------------------------|
| <i>A1</i> to <i>A6</i> | <i>M1'</i> to <i>M3</i> |
| <i>B1</i> to <i>B3</i> | <i>M1</i> to <i>M3</i> |
| <i>C1</i> to <i>C3</i> | <i>W1</i> and <i>W2</i> |
| <i>G1</i> to <i>G3</i> | |

NOTE — All tubes, cell, etc, filled with water; shaded portions filled with mercury; dashed portion filled with oil.

FIG. 1 GENERAL SET UP OF APPARATUS WITH DETAILS OF SUGGESTED VARIETY

pot (3) and its corresponding bottom mercury pot (4). The movable bracket (1) can be moved up or down as necessary to apply any desired pressure. The maximum amount of pressure that can be thus applied is controlled by the floor to ceiling height of the laboratory. The range of cell pressure that can be applied as noted above can be doubled by using two pairs of mercury pots in series by closing valve *M1* and opening valves *M2*, *M3*, *C3* and *C2*. Pressure from mercury pots (3) and (4) is conveyed via valve *M3* to top of mercury pot (5) fixed at the ceiling and is thus added to the pressure contribution from mercury pots (5) and (6) before it is conveyed to the cell via valves *M2*, *C3* and *C2*.

3.4.3.1 The cell pressure is maintained at a constant level by hanging the top mercury pots on specially designed springs (2). The spring constant of the springs is given by the formula:

$$k = \frac{A_p \gamma_m}{2 - \frac{\gamma_w}{\gamma_m}} - W$$

where

k = spring constant,

A_p = the cross-sectional area of the inside of the mercury pot,

γ_m = the unit weight of mercury,

γ_w = the unit weight of water, and

W = the weight per unit length of the flexible pressure tubing filled with mercury connected to the mercury pot. (*W* shall include the weight of mercury in the tubing).

3.4.4 *A System to Measure Drainage of Water from the Sample During the Consolidation Phase of the Test* — See (10) in Fig. 1. With valves *B1* and *B2* open and valve *B3* closed water flows out of the sample and into burette (10).

3.4.5 *A System to Apply Back Pressure to the Sample in Order to Saturate it* — See (33) in Fig. 1. With valves *B1* and *B3* open and valve *B2* closed, pressure can be raised in the pore water of the sample through the mercury pot system connected to valve *M1'*, *M2'*, and *M3'* (with valves *M2'* and *M3'* closed and valve *M1'* open, pressure will be applied by a single pair of mercury pots; with valve *M1'* closed and valves *M2'* and *M3'* open, higher pressure will be applied by two pairs of mercury pots connected in series).

3.4.6 *A System to Measure Cell Pressure and Back Pressure* — See (9) in Fig. 1. Cell pressure can be read on the pressure gauge (9) with valves

C2, C3, G2 and G1 open and valves W1, W2 and G3 closed. Back pressure can be read on the pressure gauge (9) with valves B1, B3, G3 and G1 open and valves W1, W2, G2 and B2 closed. The pressure gauge (9) which should have a least count of at least 0.1 kgf/cm^2 shall be so mounted in the system that it is at about the same elevation as the mid-height of the soil sample.

3.4.7 A System to Push Water into or to Withdraw Water from Zones in the Cell Pressure Application System and in the Back Pressure Application System — See (8) in Fig. 1. Clockwise rotation of the handle of the screw control cylinder (8) pushes water out of the cylinder and into the zone determined by valve positions anti-clockwise rotation of the handle draws water into the cylinder.

3.4.8 A System to Measure Pore Water Pressure — See (26) to (32) in Fig. 1. Pore water pressure measurement is made with valves B1, A4, A5 and A6 closed and valves A1, A2 and A3 open if pressure is to be read in the pressure gauge (30). If pressure is to be measured on the monometer (32) then valves B1, A3, A5 and A6 are closed and valves A1, A2 and A4 are opened. The pressure gauge (30) which should have a least count of at least 0.1 kgf/cm^2 and the manometer (32) shall be so mounted in the system that they are at about the same elevation as the mid height of the sample. The crucial requirement for the pore water pressure measuring system is that it shall be able to measure the pore water pressure under undrained condition, that is, water should neither flow out of the soil sample nor flow into it during the process of measurement. This is ensured by:

- a) using a tube which expands a negligible amount when stressed internally (for example, annealed tube) between the valve A1 and the null indicator;
- b) completely de-airing the drainage and back pressure line (23), the pore pressure measurement line (25), the tubing (26) and the null indicator (27); and
- c) using the null indicator.

NOTE — For the purpose of understanding how this equipment works, the null indicator may be considered to be narrow bore U-tube with mercury filled in the bottom of the U-tube, and also partially filling a vertical limb of the U-tube. Before beginning to make a measurement, the pore water pressure measuring system shall be brought to the same pressure which exists in the pore water of the sample and which is determined by the position of valves B2 and B3 in the drainage and back pressure line (23). This is achieved by opening valves A2, A3 and A4 but keeping valve A6 closed and using screw control cylinder (29) to build up pressure in the pore pressure measuring system to approximately equal the pore water pressure in the soil sample and then by connecting the pore pressure measurement line (25) and the drainage and back pressure line (23) together by keeping open valve B1 and opening valve A1. With pressure in the measuring system now equal to the initial pore water pressure in the sample and recorded by pressure

gauge (30), the position of the mercury-water interface in the left limb of the U-tube is set at a convenient height by using the screw control cylinder (29). Valve B1 is closed. The external stress conditions on the soil sample are changed which induce changes in pore water pressure. If the induced pore water pressure is positive there will be a tendency for the pore water to move out of the sample, travel through the tubing (26) and push the mercury-water meniscus in the left limb of the U-tube down from its initially set position. This movement of the meniscus is prevented by operating the screw control cylinder (29) and raising pressure on the right limb of the U-tube. When the pressure built up by the screw control cylinder equals the induced pore water pressure there will be no tendency for the meniscus to move. By keeping the meniscus at its initially set position, the null condition or the undrained condition is maintained and the increase in pore water pressure is obtained by observing the increase in the pressure reading in the gauge (30). If the induced pressure in the pore water had been negative there would have been a tendency for the mercury-water meniscus to rise which can be countered by operating the screw control cylinder (29) and reducing the pressure on the right limb. The induced reduction in pressure can then be obtained by observing the decrease in the pressure reading in the gauge (30).

3.4.9 The Membrane Stretcher — See Fig. 2. To mount the membrane and the rubber 'O' rings on the soil sample and loading cam/pedestal.

3.4.10 Rubber Membrane — See (16) in Fig. 1. The soil sample is enclosed in a rubber membrane impermeable to water, to isolate the sample from the water in the cell. The membrane should be about 140 mm long. Its thickness should be about 0.2 mm.

3.4.11 Rubber 'O' Rings — See (17) in Fig. 1. Seamless rubber 'O' rings should be used to seal the rubber membrane to the loading cap and pedestal. The unstretched inside diameter of the 'O' ring should be 31 ± 1 mm. At least two, usually more, 'O' rings are used both for sealing with the loading cap and with the pedestal.

3.4.12 Coarse Porous Stones — See (18) and (21) in Fig. 1. Coarse porous stones should be placed at the top and bottom of the sample to provide a free draining surface to the pore water. The stones should be about 3 mm thick and should be made of material whose particle size is between 180 and 150 micron IS Sieves.

3.4.13 Filter Paper for Strips [See (19) in Fig. 1] and Discs — Filter paper strips should be provided along the height of the sample at its circumference to induce radial drainage. In lieu of strips a rectangular paper of appropriate size with parallel slits may be wrapped around the sample after soaking the paper in water. Filter paper discs should be placed between the sample ends and the coarse porous stones to prevent the stones from becoming clogged due to migration of fine soil particles with the pore water. The filter paper to be used for this purpose should be such that it does not soften in water (for example, Whatman's No. 54 or equivalent).

3.4.14 Accessories — Also required are accessories for soil sample preparation, extrusion, trimming and for measurement of size, weight, water content, etc.

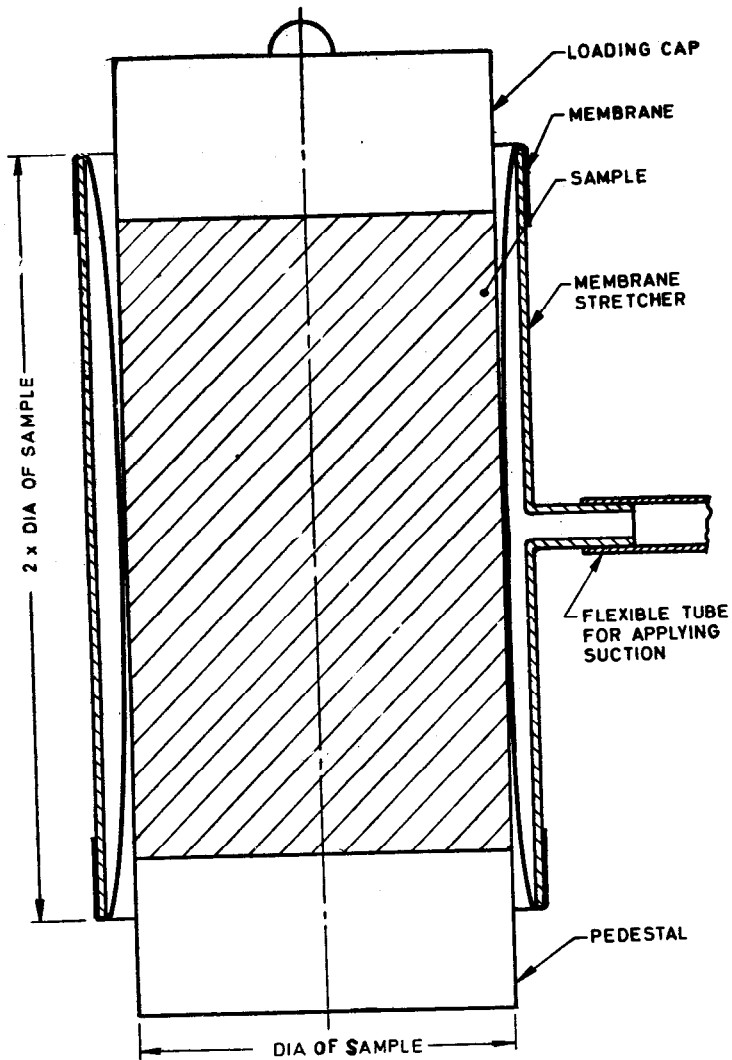


FIG. 2 TYPICAL APPARATUS FOR MEMBRANE STRETCHER

4. PROCEDURES FOR COMMISSIONING APPARATUS

4.1 Deairing of Pore Pressure Measurement Line — To make accurate measurements of pore water pressure, the pore pressure measurement line shall be completely de-aired and shall contain deaired water from the line's outlet in the pedestal of the base of the triaxial cell to the mercury-water meniscus in the null indicator. This is achieved as described in 4.1.1 to 4.1.5. The description assumes that all valves are initially closed, and the top of the triaxial cell is lying on a table separated from the base.

4.1.1 Open valve *A6* and fill de-aired water in screw control cylinder (29) from reservoir of de-aired water (31) by moving the handle of the screw control cylinder in the anti-clockwise direction. Close valve *A6* when cylinder is more than three quarters full.

4.1.2 Open valves *A2* and *A3* and adjust pressure so that pressure gauge reads zero. Open valve *A1* and by operating the handle of the screw control cylinder bring the mercury down to the horizontal part of U-tube in the null indicator. Tilt the null indicator such that the mercury settles at the bottom part of the horizontal limb of the U-tube and such that when the water is pushed from the screw control cylinder it passes over the mercury to the tubing (26). Mercury shall always be prevented from coming in contact with brass and copper fittings since it reacts with these materials. By operating the screw control cylinder push water from the cylinder to pass over the mercury in the null indicator, through the tubing (26) and let it overflow at the pedestal on the base of the triaxial cell. Flush water thus through the pore pressure measurement line until screw control cylinder is empty. Close valve *A2*, open valve *A6*, refill screw control cylinder, then close valve *A6*, open valve *A2* and flush the pore pressure measurement line again until screw control cylinder is half empty. This flushing will push out most of the air from the pore pressure measurement line. Close valve *A1*, build up pressure of about 6 kgf/cm² in the tubing (26) and null indicator by rotating the handle of the screw control cylinder in the clockwise direction. Leave the system under pressure for one to two hours. Open valve *A1* and flush out some more water through the pore pressure measurement line. The line is most likely deaired.

4.1.3 To check whether the pore pressure line has been de-aired or not proceed as follows. This check, however, tests the line from the null indicator to valve *A1* only and not beyond valve *A1* to the pedestal.

With valves *A1*, *A4* and *A6* closed and valves *A2* and *A3* open, tilt null indicator so that mercury shifts to the left side of the horizontal part of the U-tube. Build up pressure by operating the screw control cylinder (29). As pressure is built up, mercury will rise in the left limb of the U-tube. If the pore pressure line from the null indicator to valve *A1* has a lot of air it will compress as pressure builds up and lot of mercury will

be pushed into the left limb of the U-tube. On the other hand, if the above mentioned portion of the pore pressure line has been deaired, the rise of the mercury in the left limb of the U-tube when pressure is built up will be insignificant and only due to the slight expansion of the tubing (26). The rise should be less than 10 mm for an increase pressure of 8.0 kgf/cm².

4.1.4 Apart from de-airing, there shall be no leaks in the pore pressure measuring apparatus. This may be checked visually as well as by subjecting different segments of the apparatus to pressure by operating the screw control cylinder (29) and seeing, by observing the pressure gauge (30), if pressure is maintained in the segment; if the pressure drops to zero with time, some leak in the segment under study is indicated and this shall be isolated and eliminated.

4.1.5 When the pore pressure measuring apparatus has been deaired and systematically checked to ensure that no leaks exist, the mercury in the null indicator is again brought to the horizontal part of the U-tube as described in 4.1.2, water is pushed from the screw control cylinder through valve A2 over the mercury, through valve A1 until the pedestal is covered with water. Valve A1 is then closed and pressure built up in the apparatus to about 6 kgf/cm² by operating the screw control cylinder (29). The apparatus is left thus under pressure until required.

NOTE — During the consolidation phase of the \overline{CU} test, the pore pressure measuring unit is not required. The unit may be used elsewhere in the laboratory. For such purpose close valves A1 and A2 and disconnect the unit where the tubing (26) meets valve A1. Prior to applying back pressure this connection shall be remade and to avoid any air getting trapped in the line during connection, the following procedure shall be observed: the connection shall be made under water : (a) while water is flowing out from the tubing (26) which can be arranged by keeping mercury in the horizontal limb of the null indicator, valve A2 open and moving the screw control cylinder (29) clockwise, and (b) while water is flowing out from valve A1 which can be arranged by opening valves A1, B1 and B2 and letting water flow from burette (10) through the pedestal and out at valve A1.

4.2 De-airing of Drainage and Back Pressure Line (see Fig. 1) — There shall be no air in the drainage and back pressure line (23) (see 3.4.8). The deairing is achieved as in 4.2.1 to 4.2.3 and the description with reference to Fig. 1 assumes that initially all valves associated with this line are closed.

4.2.1 Open valves B2 and B1 and let deaired water flow from burette (10) to overflow at top of pedestal on the base of the triaxial cell. Keep the burette supplied with deaired water and let water flow until no air bubbles are observed to emerge at the pedestal. Close valve B2.

4.2.2 Open valves W1, G1, G3 and B3 and let deaired water flow from water reservoir (7) to overflow at top of the pedestal on the base of the

triaxial cell until no air bubbles are observed to emerge at the pedestal. Close valves *W1* and *B1*.

4.2.3 Operate screw control cylinder (8) and build up pressure in the back pressure and drainage line (23) to 6 kgf/cm². Leave the system under pressure for one to two hours. Open valve *B1* and flush out some more water through the drainage and back pressure line by operating the screw control cylinder. Let some water stand on the pedestal and close valve *B1*.

4.2.4 Check for leaks in the line in a manner similar to that described in 4.1.4 and systematically eliminate leaks.

4.3 Commissioning Self-Compensating Mercury Pot Systems — The mercury pot systems apply pressure on account of the difference in the elevation of levels of mercury in the top and the corresponding bottom mercury pots. For applying pressure it is necessary, therefore, that there be mercury in both the top and the corresponding bottom mercury pots. Mercury can be moved from one pot to another as in 4.3.1 to 4.3.4. The description with reference to Fig. 1 assumes that all valves associated with the system are initially closed.

4.3.1 To Bring Mercury Down from Movable Pot (3) to Bottom Pot (4) — Open valves *M1*, *G2* and *W1*; mercury will thus flow from movable pot (3) to bottom pot (4) and water from pot (4) will be pushed up into water reservoir (7). When required amount of mercury has come down to pot (4) close valve *W1*.

4.3.2 To Push Mercury Up from Bottom Pot (4) to Movable Pot (3) — With valves *M1* and *G2* open, operate screw control cylinder (8) and push water from screw control cylinder to bottom pot (4) which will push mercury up to movable pot (3).

4.3.3 To Bring Mercury Down from Fixed Pot (5) to Bottom Pot (6) — This can be accomplished only by simultaneously bringing down mercury from movable pot (3) to bottom pot (4). Open valves *M2*, *M3*, *G2* and *W1* and valve *M1* closed, mercury will flow from movable pot (3) to bottom pot (4) which will push water up through valve *M3* to top fixed pot (5) and mercury from pot (5) will then flow down to bottom pot (6) which in turn will push water up through valves *M2*, *G2* and *W1* to water reservoir (7). When required amount of mercury has come down from top pots to corresponding bottom ones, close valve *W1*.

4.3.4 To Push Mercury Up from Bottom Pot (6) to Top Fixed Pot (5) — This too can be accomplished only by simultaneously pushing mercury up from bottom pot (4) to movable top pot (3). With valves *M2*, *M3* and *G2* open, operate screw control cylinder (8) and push water from screw control cylinder to bottom pot (6) which will push mercury up to pot (5) and simultaneously mercury from pot (4) will go up to pot (3).

4.4 De-airing of Filter Paper Strips and Discs and Porous Stones — For rapid drainage of water from soil sample during consolidation and for rapid equalization of pore water pressure during shear, it is necessary to place two coarse porous stones and two filter paper discs, one set of stone and disc at top of the sample (18) in Fig. 1 and one set at the bottom of the sample (21) and to place about 8 filter paper strips of suitable dimensions vertically along the exposed surface of the sample (see Note). The filter paper strips should be placed so that they are in contact with the top and bottom porous stones and so that they do not protrude out from under the rubber 'O' rings. The filter paper strips and discs and the porous stones should also be de-aired. The de-airing is achieved by immersing them in a pan of water and boiling the water. After the water has boiled for about 10 minutes let the water cool keeping the strips, discs and stones immersed.

NOTE — Alternately a filter paper of length $(\pi D_o + 5)$ mm and width equal to $(L_o + 6)$ mm with slits of 5 mm width leaving 5 mm width of filter paper cut with a sharp blade or knife, may be wrapped around the sample (where D_o is the diameter of the sample and L_o is the height of the sample).

4.5 The Rubber Membrane — See (16) in Fig. 1. The membrane shall be checked for leaks, by pinching one end and filling the membrane with water, then pinching the other end and building up pressure by squeezing the water into small zones in turn. After checking for leaks the rubber membrane should be dried and some french chalk applied to it.

4.6 The Loading Ram — See (13) in Fig. 1. The ram should move freely in its bush at the top of the triaxial cell. If it does not, it should be cleaned with a soft and absolutely clean cloth and lightly oiled. The loading ram when fully lifted should fall freely and smoothly under its own weight.

4.7 The Pedestal and Loading Cap — The pedestal at the base of the cell (see Fig. 1), and the loading cap (15) should be carefully cleaned and their vertical sides lightly greased with high vacuum silicon grease.

5. SOIL SAMPLES FOR TEST

5.1 Number of Samples — Normally a minimum of three samples of the soil are required to be able to determine the strength parameters. The three samples are then tested under three different effective confining stresses in the stress range of interest for the investigation in hand.

5.2 Type of Sample and Soil — The method described herein is equally valid for disturbed or undisturbed samples obtained by sampling from the field as well as for samples prepared in the laboratory by compaction, remoulding or any other process. Cohesionless soil samples are unable to stand on their own without lateral support. Samples of such soil are formed directly on the pedestal at the base of the triaxial cell. The procedures relevant to cohesionless soils are described in Appendix A. The procedure

described in 6 is for soil samples which are cohesive enough to stand on their own and which can be handled. The samples shall be brought to a diameter equal to the diameter of the pedestal of the triaxial cell and they shall have a height equal to twice their diameter.

5.3 Pre-sample Handling Operations — Prior to handling the soil for preparation of soil samples, the equipment should be commissioned and thoroughly checked as described in 4.

5.4 Control Measurements — For control purposes, the initial diameter, length and weight of the sample shall be measured before setting it up for test; the measurements shall be recorded in the proforma given in Appendix B. The water content of the soil sample which may be ascertained by determining the water content of the parent soil from which the sample has been trimmed or shaped should also be recorded in the proforma.

6. TEST PROCEDURE

6.1 The test should be conducted in an environment in which ambient temperature is constant.

6.2 Setting Up of Sample — See Fig. 1. All valves are assumed to be closed and it is also assumed that the pedestal at the base of triaxial cell is covered with water as described in 4.1.5.

6.2.1 Gently slide one de-aired coarse porous stone on to the top of the pedestal and blow off any excess water from the pedestal. Place a filter paper disc on the stone and then place the soil sample on the disc. Place the second de-aired disc and then the coarse porous stone on top of the sample and the loading cap on top of the second porous stone. Ensure that the sample, the stones, the discs, and the loading cap are all concentrically placed on the pedestal.

6.2.2 Envelope the sample with eight de-aired filter paper strips placing each strip in turn so that it touches the top and bottom porous stones and arranging them so that they are placed at regular intervals around the entire circumference of the sample. Alternately wrap the filter paper with slits, around the sample.

6.2.3 Mount the rubber membrane on the membrane stretcher (see Fig. 2). Suck out the air between the membrane and the stretcher wall and lower the stretcher on to the soil sample. Release the vacuum between the membrane and the stretcher wall and let the membrane cling on to the soil sample. Unfold the membrane from the top and bottom of the stretcher and loading cap and the pedestal.

6.2.4 Mount rubber 'O' rings at the edge of the membrane stretcher and by again lowering the stretcher on the sample, slip off two 'O' rings to seal the membrane to the pedestal and then two 'O' rings to seal the membrane to the loading cap.

6.2.5 Place the top of the triaxial cell on its base and screw the two together. While placing the top make sure the loading ram is pulled sufficiently out of the top so that it does not hit the soil sample when the cell is being assembled.

6.2.6 Fill up cell with water as described in 3.4.2 until the cell is almost full. Fill the remaining space in the top of the cell by injecting oil through the oil inlet (14). When excess oil begins to spill out through the air vent (12) close both the air vent and the oil inlet.

6.2.7 With valves *C1*, *A1* and *B1* closed and valve *C2* open, apply cell pressure as described in 3.4.3 equal to the desired amount of effective confining pressure and record it in the proforma given in Appendix B. The sample is now set up.

6.3 Consolidation of Sample — The sample will begin to consolidate as soon as valves *B1* and *B2* are opened (valves *B3*, *A1* and *C1* are still closed). Before opening valves *B1* and *B2* ensure the following:

- a) That the water level in burette (10) is at an appropriate level so that water draining from or into the sample can be observed and recorded. The burette should be so positioned that the water level in it is approximately at the same elevation as the mid-height of the sample.
- b) That the initial reading of the water level in the burette (10) is recorded in the proforma in Appendix B.
- c) That the observer is ready to record data time *versus* flow of water into or out of the burette (10).

6.3.1 Recording Data — Immediately upon opening valves *B1* and *B2* data of burette reading *versus* time and elapsed time should be recorded in the proforma in Appendix B. Readings may be taken for elapsed times which have a whole number for their square root, that is, for 1, 4, 9, 16, 25, 36, 49 and 64 minutes, etc, and continued until essentially complete consolidation has occurred, or for a maximum of 24 hours.

6.3.2 Computation of Post-Consolidation Dimensions of Sample — On account of volume change occurring in the soil during consolidation the length and diameter of the sample alter. The dimensions after consolidation

may be estimated on the assumption that the sample remains a cylinder and that the soil behaves isotropically as follows:

$$L = L_o \left(1 - \frac{\Delta V}{3V_o} \right)$$

$$D = D_o \left(1 - \frac{\Delta V}{3V_o} \right)$$

where

L = post-consolidation length,

L_o = original length,

ΔV = change in volume during consolidation and is positive if volume has decreased,

V_o = original volume,

D = post-consolidation diameter, and

D_o = original diameter.

These dimensions should be recorded in the proforma in Appendix B.

6.3.3 Computing Coefficient of Consolidation — From data recorded as in 6.3.1, the coefficient of consolidation, c_v , a parameter which is used for determining the deformation rate as described in 6.4.4 may be determined. In col 3 of Pre-shear Data Sheet No. 1 of Appendix B fill in square root of t , the elapsed time, and in col 5 fill in ΔV , the change in sample volume, being the difference between burette reading at each time and the initial burette reading. Plot ΔV versus square root of time as shown in Fig. 3 and determine t_{100} . c_v can then be determined from the formula:


$$c_v = \frac{\pi D^2}{100 t_{100}}$$

where D is the diameter of the sample in cm.

This formula is valid only for a sample whose length is twice its diameter and which has a coarse porous stone on its two ends and is enveloped with filter paper strips.

6.4 Pre-shear Operations — Before proceeding to shear the soil sample, a number of operations should be completed and a few decisions taken as described in 6.4.1 to 6.4.4.

6.4.1 Application of Back Pressure — During the consolidation process described in 6.3 the pore water was allowed to drain into the burette until equilibrium was achieved. This implies that the pore water pressure at the

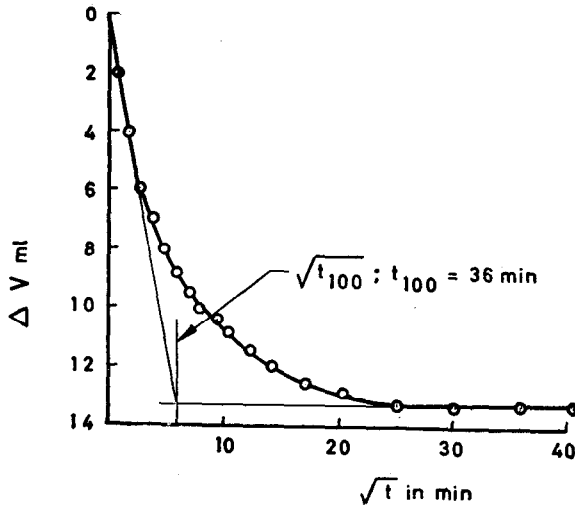FIG. 3 PLOT OF ΔV Versus \sqrt{t}

end of consolidation became zero, that is atmospheric pressure. The total stress on the sample is equal to the cell pressure and since pore water pressure is zero, the effective stress is also equal to the cell pressure. The sample can be sheared under undrained conditions with this same effective stress and sample volume but by using elevated cell and pore water pressure. This is achieved by merely increasing both the cell pressure and the pore water pressure by equal amounts. The difference between the two elevated pressures thus equals the initial cell pressure. Testing under an artificially elevated cell pressure and pore water pressure is referred to as testing under a back pressure. The back pressure equals the elevated pore water pressure. This has two advantages:

- a) During shear, negative pore water pressure is induced in some soils. If pre-shear pore water pressure is zero, development of negative pore water pressure implies below atmospheric pore water pressure which is difficult and sometimes impossible to measure on account of the consequent cavitation in the water in the pore water pressure measuring system. Development of negative pore water pressure during shear when sample has a back pressure results merely in lowering the positive value of pore water pressure and if back pressure selected is higher than the maximum negative pore water pressure induced, the magnitude of pore water pressure remains above atmospheric and is readily measurable.

- b) Even in supposedly saturated soil samples, the pore space sometimes contains some air which on application of total stress to the sample compresses and causes volume change in the sample as well as causes effective stress to increase even under undrained conditions. By application of back pressure the air gets compressed and dissolved in pore water and one can ensure that the soil is fully saturated. This can be tested by measuring the B-factor of the soil as described in 6.4.2. Back pressure may be continued to be increased until B-factor becomes unity thus assuring that soil is 100 percent saturated.

6.4.1.1 To apply back pressure, cell pressure and pore water pressure should be increased simultaneously by the same amount. This is achieved as follows (see Fig. 1) :

Close valves *B2*, *B1* and *C2* (valves *C1* and *A1* are already closed). By operating valves *C3*, *G2*, *G1*, *M1*, *M2*, *M3* and associated mercury pots as described in 3.4.3 increase cell pressure to be applied by an amount equal to the back pressure to be applied. (Back pressure should be applied in small steps of about 0.5 kgf/cm² so as to avoid creating stress concentration in soil sample). Close valve *G2*. Operate valves *G1*, *G3*, *B3*, *M1'*, *M2'* and *M3'* and the associated mercury pots as described in 3.4.5 and set the system to apply the desired amount of back pressure. Simultaneously open valves *B1* and *C2* and let the sample come to equilibrium by allowing the new stresses to act on it for say 2 to 4 hours. Repeat the above process in steps until enough back pressure has been applied to achieve the two advantages described in (a) and (b) of 6.3.1.

6.4.2 *Testing for B-Factor* — As noted in 6.4.1(b) the sample is saturated when it exhibits a B-factor of preferably 1.0 but not less than 0.9. The sample can be tested for B-factor at any stage during the process of back pressure application. The procedure is as given in 6.4.2.1 (see Fig. 1).

NOTE — In certain soils such as residual clays and very stiff soils B-factor may be less than one at saturation.

6.4.2.1 Open valves *A2* and *A3* and bring pressure in the pore pressure measuring system to a value approximately equal to the pressure then existing in the pore water of the sample by operating screw control cylinder (29). Open valve *A1* and let the pressure in the pore pressure measuring system equalize with the existing pore water pressure. Tilt the null indicator (27) and set the mercury in the left limb of the U-tube as described in 3.4.8. Close valve *B1*. Increase cell pressure through valve *C2* by a known amount and measure the increase in pore water pressure as described in 3.4.8. The ratio of increase in pore water pressure to the increase in cell pressure is the B-factor which should be recorded at the bottom of Pre-shear Data Sheet No. 1 of Appendix B. If B-factor is less than 1.0, greater back pressure needs to be applied. To bring the system back to the set up

used for applying back pressure set the back pressure to be applied using valves $M1'$, $M2'$, $M3'$, etc, and use screw control cylinder (29) to increase the pore water pressure to the desired level of back pressure, then open valve $B1$. Use screw control cylinder (29) to withdraw mercury from the left limb of the U-tube to the bottom part of the U-tube and then close valve $A1$. Let the sample equilibrate under the new cell and back pressure.

6.4.3 Setting Proving Ring and Dial Gauge

6.4.3.1 Loading frames subject the soil to axial deformation. The load required to cause deformation is usually measured by a proving ring placed between the yoke of the loading frame and the loading ram of the triaxial cell (see Fig. 4). An appropriate proving ring should be chosen for each test. The proving ring should be selected so that its capacity is greater than the load required to fail the sample but not so great that precision in measuring the load is lost. An estimate of the load required to fail the sample may be made by assuming reasonable values for the angle of shearing resistance in terms of effective stress, ϕ' and the A-factor at failure A_f for the soil and using the equation below;

$$\text{Load to fail} = P_f = \sigma_c A_r + 2A \frac{(\sigma_c - \mu_B) \sin \phi'}{1 - (1 - 2A_f) \sin \phi'}$$

where

σ_c = cell pressure,

A_r = the area of the loading ram,

A = the area of the sample, and

μ_B = the back pressure.

Proving ring to be used should have a capacity about 1.5 to 2.0 times the load required to cause failure as computed above.

6.4.3.2 A dial gauge is usually used to observe axial deformation of the soil sample. It should have a least count of at least 0.02 mm and should be mounted on the proving ring as shown in Fig. 4. As the loading frame operates, it reduces the space between the yoke of the frame and the base of the cell. This reduction in space is shared by compression of the proving ring and compression of the soil sample. By mounting the dial gauge on the proving ring only the axial deformation of the sample is measured. The proving ring dial measures the compression of the proving ring which is related to the load on the proving ring by the calibration curve of the proving ring.

6.4.4 Setting Deformation Rate — The rate of deformation at which the loading frame should be set should be selected for each soil. Since pore water pressure is being measured only at the base of the sample and the

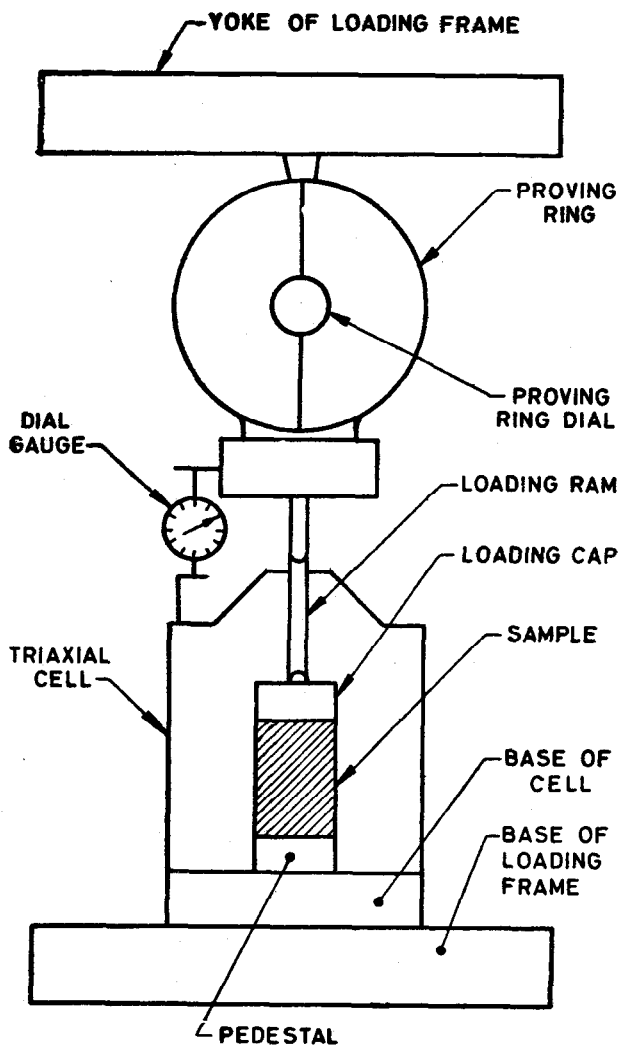


FIG. 4 SCHEMATIC SKETCH SHOWING PROVING RING DIAL AND DIAL GAUGE

failure zone is away from the base, it is imperative to shear slowly so that the pore water has an opportunity to equalize and the measured value equals the value in the shear zone. For 95 percent equalization the time to failure, t_f^* may be computed from:

$$t_f = \frac{0.071 L^3}{4c_v}$$

where

L = post-consolidation length of sample; and

c_v = as given in 6.3.3 and filter paper strips, discs and porous stones are used as described in 6.2.

and by estimating axial strain necessary to produce failure ϵ_f , rate of deformation may be calculated as:

$$\text{Deformation rate} = \frac{\epsilon_f L + \frac{P_f}{K}}{t_f}$$

where

P_f = load to fail, and

K = a linear estimate of the proving ring calibration characteristics.

6.5 Shearing of Sample — When the sample is ready to be sheared, the pore water pressure measuring equipment should be again brought into the circuit as described in the initial part of 6.4.2.1 and valve *B1* closed. The reading in gauge (30) should be recorded in first row of col 2 of Shear Data Sheet No. 2 of Appendix B and is taken to be equivalent to a pore pressure in the soil sample equal to the back pressure. The proving ring should be suspended from the yoke and in the suspended position the proving ring dial should be set to zero and the zero reading recorded in first row of col 5 of Shear Data Sheet No. 2 of Appendix B. Using manual control of loading frame the loading ram should be then pushed into the cell but not allowed to touch the loading cap. The loading frame should be run at the selected deformation rate. During this operation the proving ring records the force arising from the cell pressure acting upon the area of the loading ram, $\sigma_c A_r$ and the friction mobilized between the ram and bush; this should be recorded in second row in col 5 of Shear Data Sheet No. 2 of Appendix B. Electrical operation of the loading frame should then be

*This is valid if only the condition of failure is of interest; if, however, the complete stress path is required, this time should equal the time to the first significant value to be plotted.

stopped. With manual controls the loading ram should be pushed further into the cell gently bringing it in contact with the loading cap. The dial gauge for measuring axial deformation of the sample should now be aligned and set to zero (see Fig. 4). The sample is now ready to be subjected to additional axial stresses, that is, it is ready to be sheared. During the process of shearing, by a constant gradual adjustment of the screw control cylinder (29) the level of mercury in the left hand limb of the U-tube of the null indicator shall be maintained at its initially set location.

6.5.1 Recording Data — During shear the three observations listed below should be recorded at regular intervals of axial deformation as read on the dial gauge and noted in col 3 of Shear Data Sheet No. 2 of Appendix B corresponding to axial strain values of about 0.33 percent, 0.67 percent, 1 percent, 2 percent, 3 percent, 4 percent, etc, until failure or until 20 percent of axial strain. Observations may also be made at other suitable values of axial strain:

- a) The reading on the proving ring dial in col 5 of Shear Data Sheet No. 2 of Appendix B,
- b) The reading on the pressure gauge (30) of pore water pressure in col 2 of Shear Data Sheet No. 2 of Appendix B, and
- c) Elapsed time in col 1 of Shear Data Sheet No. 2 of Appendix B.

6.5.2 Dismantling (see Fig. 1) — Upon completion of the test, first close valve *A1*, thereby isolating the pore water pressure measuring system and thus eliminating any hazard of altering the water content of the sample during dismantling. Then shut off the loading frame and using the manual control on the loading frame remove all additional axial stress from the sample. Next shut off valve *M1/M2* and *M3* and open valve *W1* to let the cell pressure reduce to about zero. Open temporarily air and oil vents and let oil spill over the top of the triaxial cell which can be wiped clean by a dust free rag. Close valve *G1* to isolate gauge and apply vacuum to (I); then open air vent and water will be forced up into water reservoir (7). Close valve *C2* when there is just a little water left in the cell and shut off vacuum at (I). Remove top of triaxial cell. Wipe rubber membrane. Slip off rubber 'O' rings (17) and membrane (16) and remove loading cap (15) and top coarse porous stone (18) and recover sample. Peel off filter paper strips and discs and weigh the soil sample making sure that no part of the sample is lost. The post-shear weight of the sample, and the post-shear length and shape should be recorded in the Shear Data Sheet No. 2 of Appendix B. Water content data readings should be recorded in Shear Data Sheet No. 2 of Appendix B.

The triaxial cell should be cleaned with grit-free soap and water, the loading ram oiled, and the rubber membrane washed, dried and sprinkled with french chalk powder for storage until required for the next test.

6.5.3 Computation of Results — The entire computations for each triaxial test may be done on Shear Data Sheet No. 2 of Appendix B (*see also Note*). At the end of the test col 1 is filled with readings of elapsed time, col 2 with gauge readings of pore water pressure, col 3 with values of axial deformation in terms of dial gauge readings, and col 5 with readings of proving ring dial. Calculations should prove as follows:

- a) By dividing axial deformation (col 3) by post-consolidation length fill up col 4 for percentage axial strain.
- b) Using calibration curve for the proving ring used, fill up col 6 for load on proving ring.
- c) By subtracting each reading of pore water pressure (col 2) from the initial reading of pore water pressure (col 2, row 1) obtain change in pore water pressure and note it in col 7.
- d) By subtracting the value of load on proving ring when the loading frame was operated without the loading ram touching the sample (col 6, row 2) from each value of load on proving ring (col 6) obtain respective values of axial load for col 8.
- e) By dividing post-consolidation area A , by $(1 - \epsilon)$ where ϵ is the axial strain, obtain for each ϵ the value of the area of the sample A_1 at that strain.
- f) By dividing each value of axial load (col 8) by corresponding value of area of the sample A_1 (col 9) obtain values of deviator stress ($\sigma_1 - \sigma_3$), in col 10.
- g) By subtracting from the value of initial effective cell pressure, that is, cell pressure minus back pressure, each value of change in pore water pressure (col 7), obtain values of minor principal effective stress $\bar{\sigma}_3$ for col 11.
- h) By adding values of deviator stress (col 10) and minor principal effective stress (col 11) for each row in turn obtain values of major principal effective stress $\bar{\sigma}_1$, for col 12.
- j) By adding value of minor principal effective stress (col 11) and major principal effective stress (col 12) for each row in turn obtain values of sum of principal stresses $\bar{\sigma}_1 + \bar{\sigma}_3$, for col 13.
- k) By dividing each value of major principal effective stress (col 12) by corresponding value of minor principal effective stress (col 11) obtain values of principal effective stress ratio $\bar{\sigma}_1/\bar{\sigma}_3$ for col 14.

- m) By dividing each value of change in pore water pressure (col 7) by corresponding value of deviator stress (col 10) obtain values of A-factor for col 15.

NOTE — For soils of low shear strength suitable corrections may be applied for the effects of membrane, filter strip and loading ram friction. These corrections may not be necessary for routine testing.

7. DETERMINATION OF STRENGTH PARAMETERS

7.1 For determining strength parameters it is necessary to test at least three samples of the soil under investigation at three different effective cell pressures in the stress range of interest. The three soil samples should initially be as identical to each other as possible.

7.2 Strength Parameters in Terms of Effective Stress — From respective Shear Data Sheets of Appendix B or from respective stress strain curves (see Fig. 5) identify the condition of failure (see Note 1 under 7.2.1) of each of the three samples. Plot a Mohr circle for the state of stress at failure in terms of effective stresses for each of the three samples (see Fig. 6). Draw the best common tangent to the three circles. The angle the tangent makes with the horizontal is the angle of shearing resistance in terms of effective stresses, ϕ' and the intercept the tangent makes on the y-axis is the cohesion intercept in terms of effective stresses, c' (see Fig. 6).

7.2.1 The strength parameters mathematically describe the best tangent, that is, the failure envelope as follows:

$$\tau_{tf} = c' + \bar{\sigma}_{tf} \tan \phi'$$

where

τ_{tf} = the shear stress at failure on the plane of tangency (see Note 2), and

$\bar{\sigma}_{tf}$ = the normal effective stress on the plane of tangency.

NOTE 1 — What constitutes failure depends on the context in which results are to be used. Often used criteria are : (a) at peak deviator stress, (b) at peak principal effective stress ratio, (c) at 5 percent axial strain, and (d) at 20 percent axial strain.

NOTE 2 — For engineering purposes, the plane of tangency may be considered identical to the failure plane and c' and ϕ' may be considered as follows:

$$\tau_{ff} = c' + \bar{\sigma}_{ff} \tan \phi'$$

where

τ_{ff} = shear stress at failure on the failure plane, and

$\bar{\sigma}_{ff}$ = effective normal stress at failure on the failure plane.

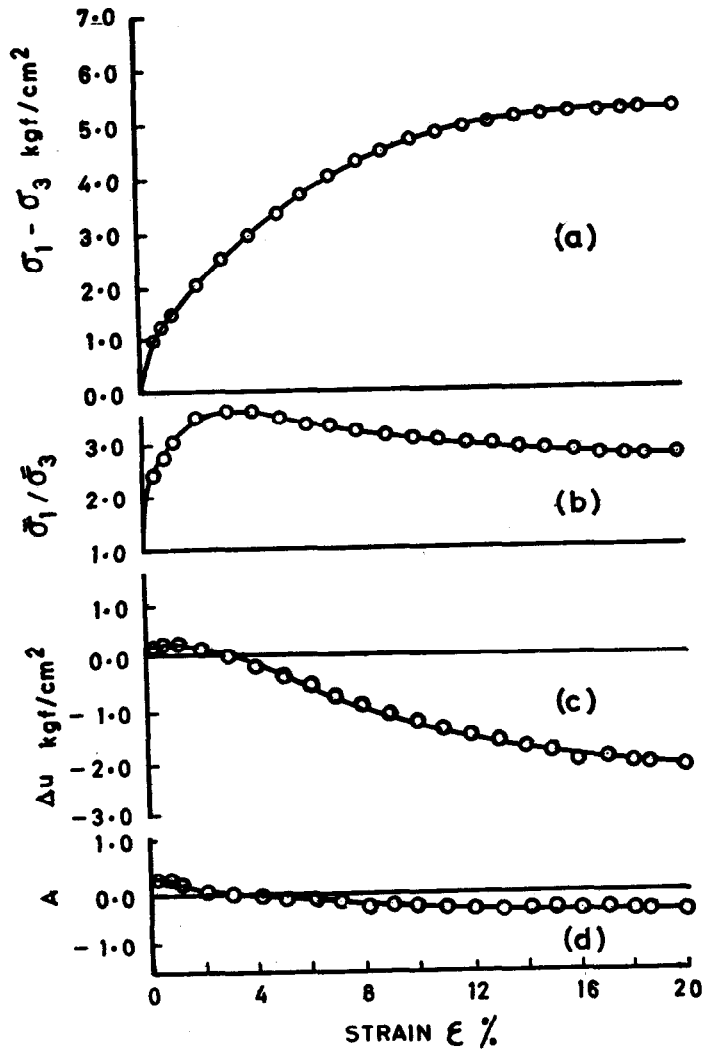


FIG. 5 STRESS-STRAIN CURVES

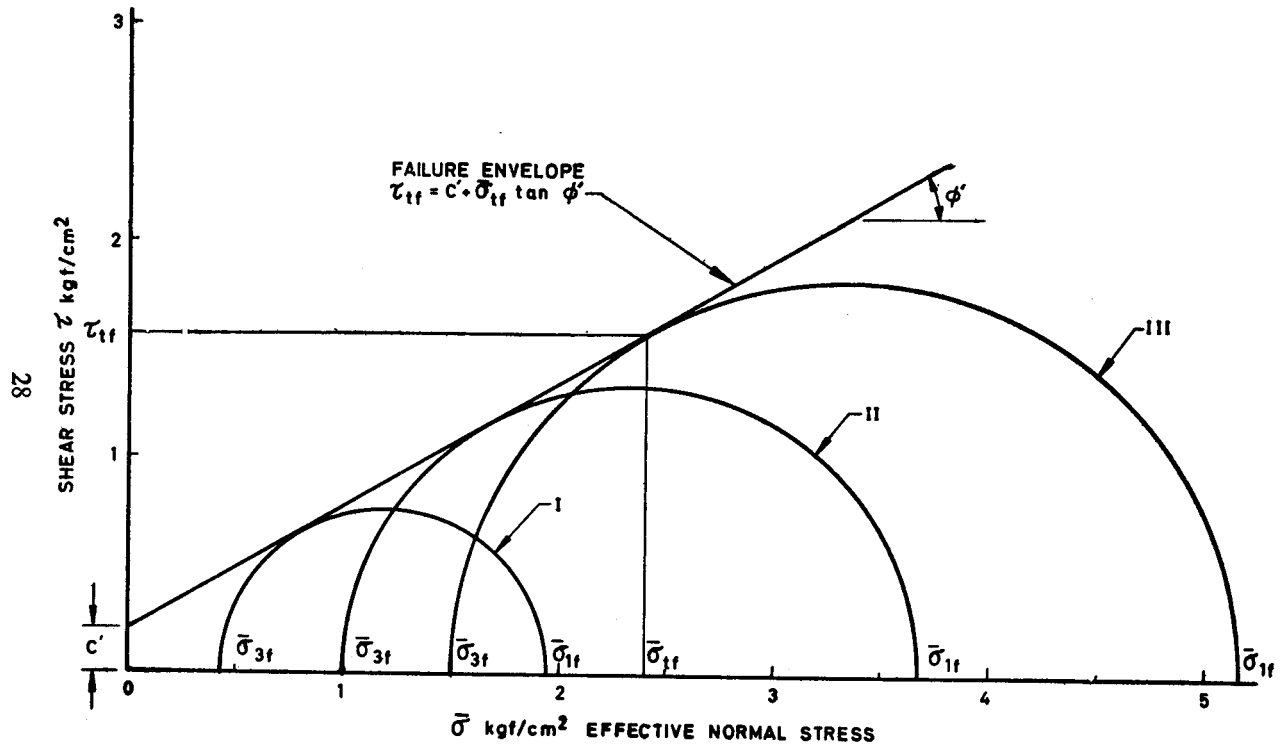


FIG. 6 STRESS CONDITIONS AT FAILURE IN TERMS OF EFFECTIVE STRESSES

7.3 Strength Parameters in Terms of Total Stresses — Follow the procedure as described in 7.2 with the difference that the Mohr circles are to be plotted in terms of total stresses. The major/minor principal total stress at failure is equal to the major/minor principal effective stress at failure plus the pore water pressure at failure. The pore water pressure at failure is equal to the back pressure plus the change in pore water pressure until failure (from col 7 Appendix B Data Sheet No. 2). The angle the tangent makes with the horizontal is angle of shearing resistance in terms of total stresses as obtained from a \overline{CU} test, $\phi_{\sigma v}$, and the intercept the tangent makes on the y -axis is the cohesion intercept in terms of total stresses as obtained from a \overline{CU} test, $c_{\sigma v}$ (see Fig. 7).

7.3.1 $\phi_{\sigma v}$ and $c_{\sigma v}$ are parameters that mathematically describe the failure envelope in terms of total stresses as follows:

$$\tau_{tt} = c_{\sigma v} + \sigma_{tt} \tan \phi_{\sigma v}$$

where

τ_{tt} = shear stress at failure on the plane of tangency, and

σ_{tt} = the total normal stress at failure on the plane of tangency (see Note).

NOTE — Plane of tangency obtained from failure envelope in terms of total stress is different from the plane obtained in terms of effective stresses; only the latter may be considered as being identical to the failure plane in the soil sample.

7.4 Undrained Strength Over Effective Confining Stress Ratio — This ratio can be obtained by obtaining for each sample the ratio of half the deviator stress at failure to the initial effective cell pressure. For normally consolidated soil this ratio is usually a constant.

7.5 c' and ϕ' may also be obtained by plotting $\frac{\sigma_1 - \sigma_3}{2}$ at failure versus

$\frac{1 + \bar{\sigma}_3}{2}$ at failure for the samples tested, as shown in Fig. 8.

8. PRESENTATION OF RESULTS

8.1 Stress-Strain Results — The results of the test on each sample may be presented in the form of stress-strain curves as follows:

Fig. 5 (a) shows deviator stress versus strain

Fig. 5 (b) shows principal effective stress ratio versus strain

Fig. 5 (c) shows change in pore water pressure versus strain

Fig. 5 (d) shows A-factor versus strain.


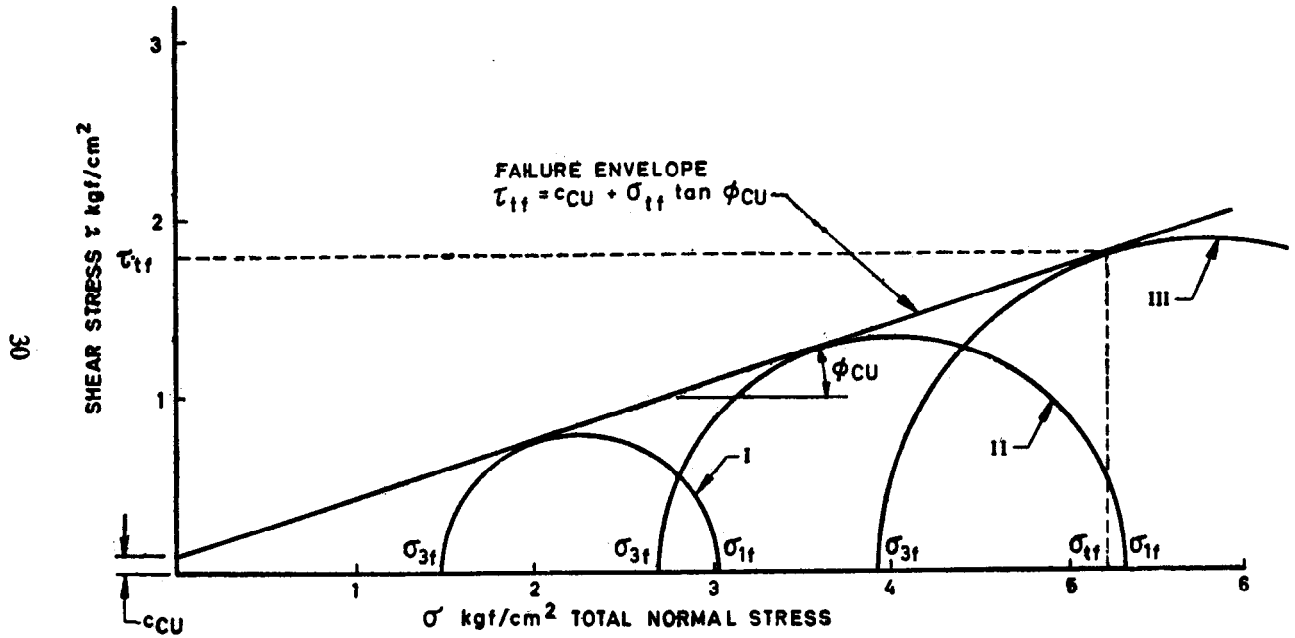


FIG. 7 STRESS CONDITION AT FAILURE IN TERMS OF TOTAL STRESS

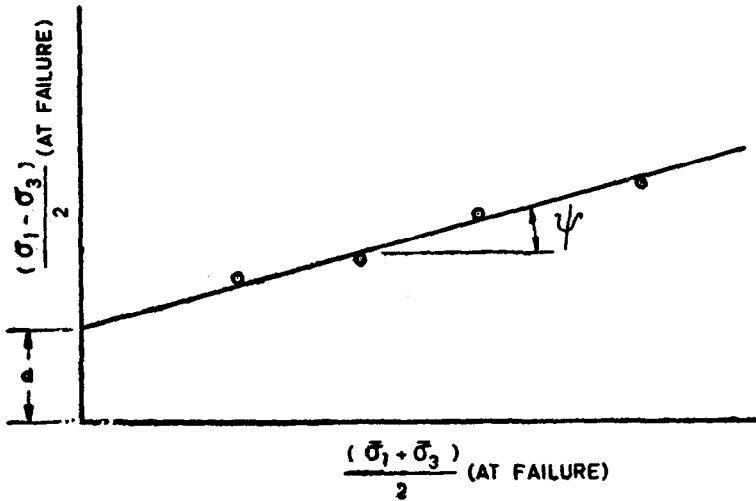

$$\sin \phi' = \tan \Psi; c' = \frac{d}{\cos \phi'}$$

FIG. 8 DETERMINING c' and ϕ' USING $\frac{\sigma_1 - \sigma_3}{2}$ (AT FAILURE) versus $\frac{\sigma_1 + \sigma_3}{2}$ (AT FAILURE) PLOT

8.2 Failure Stress Results — The failure condition of all the three samples may be shown in terms of Mohr circles at failure both in terms of effective stresses, Fig. 6 and in terms of total stresses, Fig. 7.

APPENDIX A

(Clause 5.2)

SETTING UP SAMPLES OF COHESIONLESS SOIL

A-1. PROCEDURE

A-1.1 In order to make samples of cohesionless soil for use in a triaxial test it is necessary to use a former which will maintain the required specimen shape until effective stress of sufficient magnitude to make the sample self-supporting can be applied. The former (see Fig. 9) is a split mould of

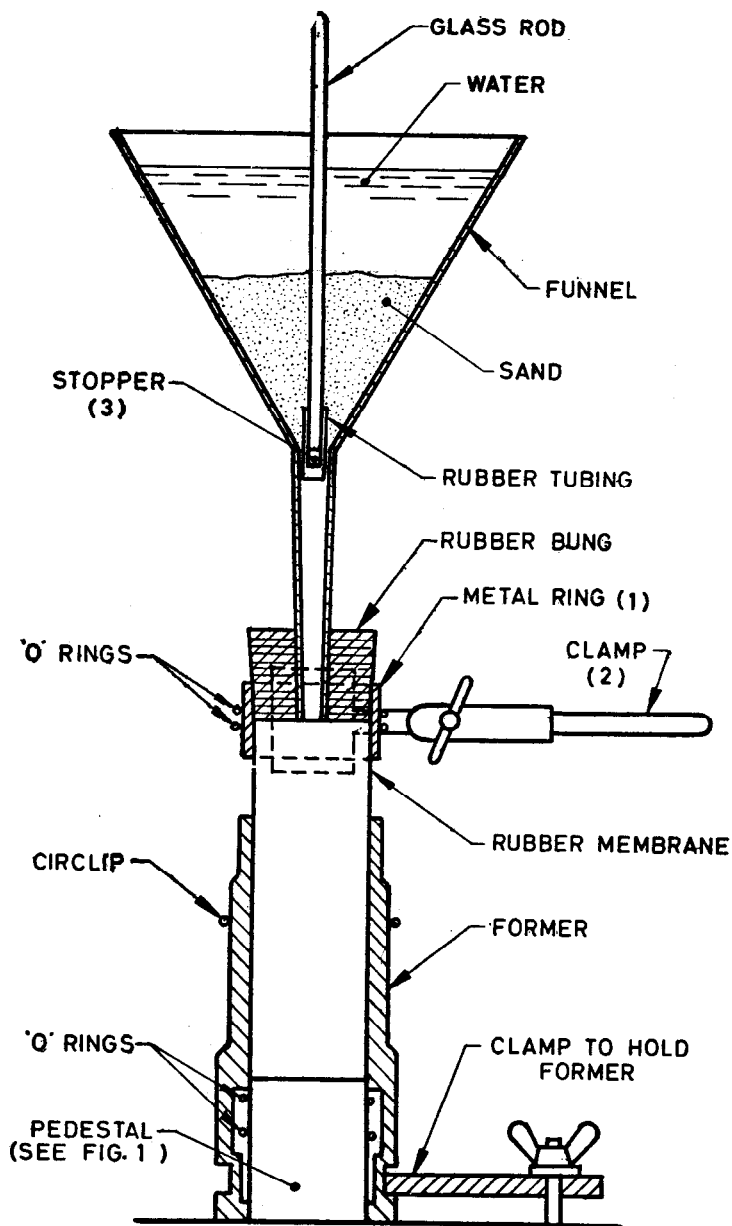


FIG. 9 SET UP FOR PREPARING SAMPLES OF COHESIONLESS SOIL

38.3 mm internal diameter which encloses the rubber membrane and is clamped to the base of the cell. The lower 'O' rings are accommodated in a groove in the former.

A-1.2 After the equipment has been commissioned as described in 5.3 the sample can be set up as given in A-1.2.1 to A-1.2.3 (All valves in Fig. 1 are assumed to be closed).

A-1.2.1 Coarse porous stone should be placed on the pedestal. The rubber membrane should be sealed to the pedestal by two 'O' rings and the split former clamped into position. The upper ring (1) in Fig. 9 should be placed inside the top of the membrane and held with the clamp (2) in Fig. 9 before placing the funnel and rubber bung in position. The membrane and funnel should be then filled with de-aired water; the pressure due to the head of water holds the rubber membrane against the inside of the former. Sufficient sand to fill the former should be weighed out and saturated by mixing in a beaker with enough water just to cover the sand. The mixture should be boiled to remove trapped air and then placed with a spoon in the funnel, the stopper (3) being in position.

A-1.2.2 The sample should be built up by allowing a continuous rapid flow into the former. To increase density of sample the former may be subjected to vibration. The funnel and stopper should then be removed. The 'O' rings should be slipped off the metal ring and the membrane folded over on to the sides of the former. After the surface of the sample has been levelled a coarse porous stone should be placed on it and the loading cap should be lowered into position. Rubber 'O' rings should be used to seal the membrane to the cap.

A-1.2.3 A small negative pore water pressure should be applied to the sample to give it rigidity, by opening valves B1 and B2 (see Fig. 1) and lowering the burette (10) (see Fig. 1) to the floor. Consolidation under this effective stress occurs almost at once, and is indicated by the change in the water level in the burette. The split mould should then be removed and the height and diameter of the sample measured, the thickness of the membrane being deducted to obtain actual sample dimensions. The rest of the test proceeds as described in 6.2 to 6.4 except that in the dismantling process the sample again loses its shape; the entire sample is used to determine the dry weight of the soil used.

IS : 2720 (Part XII) - 1981

Post-Consolidation Water Content.....

Post-Consolidation Void Ratio..... c_v

Back Pressure					
B-factor					

Remarks:

As in the Original Standard, this Page is Intentionally Left Blank

CU Triaxial Shear Test — Shear Data Sheet No. 2

Project Loading Frame No. Cell No. Test No.
 Sample No. Proving Ring No. Date
 Soil Identification Deformation Rate Tested by
 Post-consolidation Length, L Confining Pressure, σ_c
 Post-consolidation Dia, D
 Post-consolidation Area, A Back Pressure Post-Shear Weight

ELAPSED TIME (1)	GAUGE u (2)	DIAL GAUGE (3)	STRAIN % (4)	PROVING RING DIAL (5)	LOAD ON PROVING RING (6)	Δu (7)	AXIAL LOAD (8)	AREA OF SAMPLE A_1 (9)	$\sigma_1 - \sigma_3$ (10)	$\bar{\sigma}_3$ (11)	$\bar{\sigma}_1$ (12)	$\bar{\sigma}_1 + \bar{\sigma}_3$ (13)	$\bar{\sigma}_1 / \bar{\sigma}_3$ (14)	A FAC-TOR (15)	(16)	(17)
0		Proving Ring Suspended														
0		Proving Ring acted up by $\sigma_c A_r$														
0		000	0													

Post-Shear Water Content		
Specimen Location		
Can No.		
Weight of Can + Wet Soil		
Weight of Can + Dry Soil		
Weight of Water		
Weight of Can		
Weight of Dry Soil		
Water Content		

Post-Shear Length

Post-Shear Sample Shape

As in the Original Standard, this Page is Intentionally Left Blank

(Continued from page 2)

Soil Testing Procedures and Equipment Subcommittee, BDC 23 : 3

<i>Convener</i>	<i>Representing</i>
DR ALAM SINGH	University of Jodhpur, Jodhpur
<i>Members</i>	
SHRI AMAR SINGH	Central Building Research Institute (CSIR), Roorkee
SHRI M. R. SONEJA (<i>Alternate</i>)	
COL AVTAR SINGH	Ministry of Defence
LT-COL V. K. KANITKAR (<i>Alternate</i>)	
DEPUTY DIRECTOR RESEARCH (FE-II), RDSO	Ministry of Railways
DEPUTY DIRECTOR RESEARCH (SM)-III, RDSO (<i>Alternate</i>)	
DIRECTOR (CSMRS)	Ministry of Irrigation
DEPUTY DIRECTOR (CSMRS) (<i>Alternate</i>)	
DIRECTOR (PWDR)	Public Works Department, Lucknow
DR B. L. DHAWAN (<i>Alternate</i>)	
PROF GOPAL RANJAN	University of Roorkee, Roorkee
DR S. C. HANDA (<i>Alternate</i>)	
SHRI H. K. GUHA	Geologists Syndicate Pvt Ltd, Calcutta
SHRI N. N. BHATTACHARAYA (<i>Alternate</i>)	
DR SHASHI K. GULHATI	Indian Institute of Technology, New Delhi
SHRI P. JAGANATHA RAO	Central Road Research Institute (CSIR), New Delhi
SHRI M. D. NAIR	Associated Instruments Mfrs (I) Pvt Ltd, New Delhi
PROF T. S. NAGARAJ (<i>Alternate</i>)	
SHRI N. M. PATEL	Delhi College of Engineering, Delhi
RESEARCH OFFICER (B & RRL)	Public Works Department, Government of Punjab, Chandigarh

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002
Telephones: 323 0131, 323 3375, 323 9402
Fax : 91 11 3234062, 91 11 3239399, 91 11 3239382

Telegrams : Manaksanstha
(Common to all Offices)

Central Laboratory:

Plot No. 20/9, Site IV, Sahibabad Industrial Area, Sahibabad 201010

Telephone
8-77 0032

Regional Offices:

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002 323 76 17
*Eastern : 1/14 CIT Scheme VII M, V.I.P. Road, Maniktola, CALCUTTA 700054 337 86 62
Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160022 60 38 43
Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600113 235 23 15
†Western : Manakalaya, E9, Behind Marol Telephone Exchange, Andheri (East),
MUMBAI 400093 832 92 95

Branch Offices:

'Pushpak', Nurmohamed Shaikh Marg, Khanpur, AHMEDABAD 380001 550 13 48
‡Peenya Industrial Area, 1st Stage, Bangalore-Tumkur Road,
BANGALORE 560058 839 49 55
Gangotri Complex, 5th Floor, Bhadbhada Road, T.T. Nagar, BHOPAL 462003 55 40 21
Plot No. 62-63, Unit VI, Ganga Nagar, BHUBANESHWAR 751001 40 36 27
Kalaikathir Buildings, 670 Avinashi Road, COIMBATORE 641037 21 01 41
Plot No. 43, Sector 16 A, Mathura Road, FARIDABAD 121001 8-28 88 01
Savitri Complex, 116 G.T. Road, GHAZIABAD 201001 8-71 19 96
53/5 Ward No. 29, R.G. Barua Road, 5th By-lane, GUWAHATI 781003 54 11 37
5-8-56C, L.N. Gupta Marg, Nampally Station Road, HYDERABAD 500001 20 10 83
E-52, Chitaranjan Marg, C-Scheme, JAIPUR 302001 37 29 25
117/418 B, Sarvodaya Nagar, KANPUR 208005 21 68 76
Seth Bhawan, 2nd Floor, Behind Leela Cinema, Naval Kishore Road,
LUCKNOW 226001 23 89 23
NIT Building, Second Floor, Gokulpat Market, NAGPUR 440010 52 51 71
Patliputra Industrial Estate, PATNA 800013 26 23 05
Institution of Engineers (India) Building 1332 Shivaji Nagar, PUNE 411005 32 36 35
T.C. No. 14/1421, University P.O. Palayam, THIRUVANANTHAPURAM 695034 6 21 17

*Sales Office is at 5 Chowringhee Approach, P.O. Princep Street,
CALCUTTA 700072 27 10 85
†Sales Office is at Novelty Chambers, Grant Road, MUMBAI 400007 309 65 28
‡Sales Office is at 'F' Block, Unity Building, Narashimaraja Square,
BANGALORE 560002 222 39 71