भारतीय मानक

# जलदृढ़ी सीमेंट के लिए भौतिक परीक्षण की पद्धतियाँ

## भाग 15 आई छन्नी द्वारा बारीकी ज्ञात करना

## Indian Standard

# METHODS OF PHYSICAL TESTS FOR HYDRAULIC CEMENT

## PART 15 DETERMINATION OF FINENESS BY WET SIEVING

Second Reprint OCTOBER 1997

UDC 66.942 : 620.168.32

© BIS 1991

BUREAU OF INDIAN STANDARDS MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG NEW DELHI 110002

ć

**Price Group 3** 

June 1991

## FOREWORD

This Indian Standard was adopted by the Bureau of Indian Standards, after the draft finalized by the Cement and Concrete Sectional Committee had been approved by the Civil Engineering Division Council.

Standard methods of testing cement are essential adjunct to the cement specifications. This standard in different parts, lays down the test procedures to evaluate the physical properties of different types of hydraulic cement. This part covers determination of fineness of cement by wet sieving. The procedures for conducting chemical tests of hydraulic cement are covered in IS 4032 series 'Methods of chemical analysis of hydraulic cement'.

Determination of fineness by wet sieving is required mainly for masonry cement, but the same method shall be applied when any manufacturer or user wants to determine fineness of any other cement for any other specific reason.

The composition of the technical committee responsible for the formulation of this standard is given in Annex A.

In reporting the results of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS 2: 1960 'Rules for rounding off numerical values (*revised*)'.

ć

# Indian Standard

# METHODS OF PHYSICAL TESTS FOR HYDRAULIC CEMENT

## PART 15 DETERMINATION OF FINENESS BY WET SIEVING

## **1 SCOPE**

This standard (Part 15) covers the procedure for determining the fineness of cement by wet sieving as represented by the mass of the residue left on a standard 45-micron IS Sieve.

#### **2 REFERENCES**

The Indian Standards listed below are necessary adjuncts to this standard.

IS No.	Title

- 3535: 1986 Methods of sampling hydraulic cements (first revision)
- 460 (Part 1): 1985 Specification for test sieves: Part 1 Wire cloth test sieves (*third revision*)

## 3 SAMPLING AND SELECTION OF TEST SAMPLES

The samples of the cement shall be taken in accordance with the requirements of IS 3535 : 1986 and the relevant standard specification for the type of cement being tested. The representative sample of the cement selected as above shall be thoroughly mixed before testing.

## **4 TEMPERATURE**

The temperature of the room and the materials shall preferably be maintained at  $27 \pm 2^{\circ}C$ .

#### **5 APPARATUS**

#### 5.1 Sieve

The sieve frame shall be of non-corrodible material and shall be circular  $50 \pm 5$  mm in diameter. The depth of the sieve from the top of the frame to the cloth shall be  $75 \pm 5$  mm. The frame shall have either side walls  $90 \pm 5$  mm in total height or legs of sufficient length, 120 mm minimum, to allow air circulation beneath the sieve cloth. The sieve frame shall be fitted with 45 micron stainless steel woven wire cloth sieve conforming to IS 460 (Fart 1): 1985. The cloth shall be mounted in the frame without distortion, looseness or wrinkling. For a sieve fabricated by soldering the cloth to the frame, the joint shall be made smooth to prevent the cement from catching in the joints between the sieve cloth and frame. Two piece sieves shall clamp tightly on the cloth to prevent the cement from catching in the joints between the sieve cloth and the frame.

## 5.2 Spray Nozzle

The spray nozzle (see Fig. 1) shall be constructed with non-corrodible material and shall be of 17.5 mm inside diameter with a central hole drilled in line with the longitudinal axis, and intermediate row of eight holes drilled 6 mm centre to centre at an angle of  $5^{\circ}$  from the longitudinal axis, and an outer row of eight holes drilled 11 mm centre to centre at an angle of  $10^{\circ}$  from the longitudinal axis. All holes shall be of 0.5 mm diameter.

## 5.3 Pressure Gauge

The pressure gauge shall be of 75 mm minimum diameter and shall be graduated in 0.01 N/mm<sup>2</sup> increments and shall have a maximum capacity of 0.2 N/mm<sup>2</sup> with a marking at 0.07 N/mm<sup>3</sup>. The accuracy at 0.07 N/mm<sup>2</sup> shall be 0.005 N/mm<sup>2</sup>.

## 5.4 Balance

Analytical balance capable of reproducing results within 0.000 2 g with an accuracy of  $\pm$  0.000 2 g. NOTE -- Self indicating balance with equivalent accuracy may also be used.

#### 5.5 Standard Weights

#### 5.6 Oven

## 6 CALIBRATION OF 45 MICRON IS SIEVE

The calibration of the 45 micron sieve shall be made using standard reference material (SRM) from National Council of Cement and Building Materials. Place 1 000 g of the SRM on the clean dry 45 micron sieve and 1 proceed as in 7. The sieve correction factor is the difference between the test residue obtained and the assigned residue value indicated by the electro-formed sheet sieve fineness specified for the standard sample, expressed as a percentage of the test residue. The sieve shall be re-calibrated after every 100 determinations.

Example :

Residue on 45 micron IS Sieve of 14 SRM sample	0 percent
Residue for a 1 g sample	0 <sup>.</sup> 140 g
Residue on Sieve being calibrated	0.105 g
Difference	$+0.035 \mathrm{g}$
$\frac{\text{Correction}}{\text{factor}} = \frac{0.035 \times 100}{0.105} = +33.3$	percent

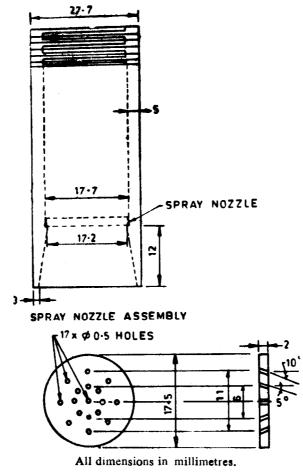


FIG. 1 SPRAY NOZZLE

## 7 PROCEDURE

Place 1'000 g of sample of the cement on a clean, dry 45 micron IS Sieve. Wet the sample thoroughly with a gentle stream of water. Remove the sieve from under the nozzle and adjust the pressure on the spray nozzle to  $0.07 \pm 0.005 \text{ N/mm}^2$ . Return the sieve to its position under the nozzle and wash for 1 min, moving the sieve with a circular motion in a horizontal plane at the rate of one motion per second in the spray. The bottom of the spray nozzle shall extend below the top of the sieve frame by about 12 mm. Immediately upon removing the sieve from the spray, rinse once with 50 ml of distilled water, taking care not to lose any of the residue, and then blot the lower surface gently upon a damp cloth. Dry the sieve and residue in an oven or over a hot plate ( see Note ), supporting the sieve in such a manner that air may pass freely beneath it. Cool the sieve, brush the residue from the sieve and weigh.

NOTE — Care should be taken not to heat the sicve hot enough to soften the solder.

## **8 CALCULATION**

Calculate the mass of the residue of the cement left on the standard 45 micron IS Sieve to the nearest 0.1 percent as follows:

$$Rc = Rs \times (100+C)$$

where

- Rc = corrected residue in percent,
- Rs = residue of the sample retained on the 45 micron IS Sieve in g, and
- C = sieve correction factor which may be either plus or minus.

Example:

Sieve correction factor,  $C = + 33^{\circ}3$  percent Residue from sample being tested, Rs = 0.092 g Corrected residue =  $0.092 \times (100 + 33^{\circ}3)$ = 12.3 percent

## ANNEX A

## (Foreword)

## **COMPOSITION OF THE TECHNICAL COMMITTEE**

Cement and Concrete Sectional Committee, CED 2

Representing Chairman DR H. C. VISVESVARAYA In personal capacity (University of Roorkee, Roorkee 247667) Members SHRI H. BHATTACHARYA Orissa Cement Limited, New Delhi DR A. K. CHATTERJEE The Associated Cement Companies Ltd, Bombay SHRI S. H. SUBRAMANIAN ( Alternate ) Central Public Works Department, New Delhi CHIEF ENGINEER ( DESIGNS ) SUPERINTENDING ENGINEER (S&S) (Alternate) CHIEF ENGINEER, NAVAGAM DAM Sardar Sarovar Narmada Nigam Ltd, Gandhinagar SUPERINTENDING ENGINEER, OCC (Alternate) Irrigation and Power Research Institute, Amritsar CHIEF ENGINEER ( RESEARCH-CUM-DIRECTOR ) **RESEARCH OFFICER ( CONCRETE TECHNOLOGY** ) ( Alternate ) A, P. Engineering Research Laboratories, Hyderabad DIRECTOR JOINT DIRECTOR ( Alternate ) DIRECTOR (C & MDD ) (N & W) DEPUTY DIRECTOR (C & MDD) (NW & S) (Alternate) Central Water Commission, New Delhi SHRI K. H. GANGWAL Hyderabad Industries Limited, Hyderabad SHRI V. PATTABHI ( Alternate ) SHRI V. K. GHANEKAR Structural Engineering Research Centre (CSIR), Ghaziabad The India Cements Limited, Madras SHRI S. GOPINATH SHRI R. TAAMILAKARAN ( Alternate ) SHRI S. K. GUHA THAKURTA Gannon Dunkerley & Company Limited, Bombay SHRI S. P. SHANKARANARAYANAN (Alternate) Central Building Research Institute (CSIR), Roorkee DR IRSHAD MASOOD DR MD KHALID ( Alternate ) JOINT DIRECTOR, STANDARDS ( B & S ) (CB-1) Research, Designs and Standards Organization (Ministry of Railways ), Lucknow JOINT DIRECTOR STANDARDS ( B & S )/ (CB-I1) (Alternate) SHRI N. G. JOSHI Indian Hume Pipes Co Limited, Bombay SHRI P. D. KELKAR ( Alternate ) SHRI D. K. KANUNGO National Test House, Calcutta SHRI B. R. MEENA ( Alternate ) SHRI P. KRISHNAMURTHY Larsen and Toubro Limited, Bombay SHRI S. CHAKRAVARTHY ( Alternate ) SHRI G. K. MAJUMDAR Hospital Services Consultancy Corporation (India) Ltd, New Delhi SHRI S. O. RANGARI ( Alternate ) SHRI P. N. MEHTA Geological Survey of India, Calcutta SHRI J. S. SANGANERIA ( Alternate ) MEMBER SECRETARY Central Board of Irrigation and Power, New Delhi DIRECTOR (CIVIL) (Alternate) SHRI M. K. MUKHERJEE Roads Wing Department of Surface Transport (Ministry of Transport ), New Delhi SHRI M. K. GHOSH ( Alternate ) National Council for Cement and Building Materials, New Delhi DR A. K. MULLICK DR S. C. AHLUWALIA (Alternate) SHRI NIRMAL SINGH Development Commissioner for Cement Industry (Ministry of Industry ) SHRIS, S. MIGLANI ( Alternate ) SHRI R. C. PARATE Engineer-in-Chief's Branch, Army Headquarters LT-COL R. K. SINGH ( Alternate )

## IS 4031 (Part 15): 1991

Momhors

#### SHRI H. S. PASRICHA SHRI Y. R. PHULL SHRI S. S. SEEHRA ( Alternate ) SHRI Y. R. PHULL SHRI K. B. THANDEVAN ( Alternate ) DR M. RAMAIAH DR A. G. MADHAVA RAO ( Alternate ) SHRI G. RAMDAS REPRESENTATIVE SHRI A. U. RIJHSINGHANI SHRI C. S. SHARMA ( Alternate ) SHRI J. SEN GUPTA SHRI A. K. LAL ( Alternate ) SHRI T. N. SUBBA RAO SHRIS. A. REDDI ( Alternate ) SUPT. ENGINEER ( DESIGNS ) EXECUTIVE ENGINEER (S.M.R. DIVISION) ( Alternate ) SHRI S. B. SURI SHRI N. CHANDRASEKARAN ( Alternate ) DR H. C. VISVESVARAYA SHRI D. C. CHATURVEDI ( Alternate ) SHRI G. RAMAN, Director (Civil Engg)

#### Representing

Hindustan Prefab Ltd, New Delhi Central Road Research Institute (CSIR), New Delhi

Indian Roads Congress, New Delhi

Structural Engineering Research Centre (CSIR), Madras

Directerate General of Supplies and Disposals, New Delbi Builders Association of India, Bombay Cement Corporation of India, New Delhi

National Buildings Organization, New Delhi

Gammon India Limited, Bombay

Public Works Department, Government of Tamil Nadu

Central Soil and Materials Research Station, New Delhi

The Institution of Engineers (India), Calcutta

Director General, BIS ( Ex-officio Member )

Secretary SHRI N. C. BANDYOPADHYAY Joint Director ( Civil Engg ), BIS

#### Cement, Pozzolana and Cement Additives Subcommittee, CED 2:1

#### Convener

Dr H. C. VISVESVARAYA

SHRI SOMNATH BANERJEE

DIRECTOR ( C & MDD II )

JOINT DIRECTOR (MATERIALS)

(CB-II) (Alternate)

SHRI R. K. DATTA ( Alternate )

( Alternate ) Shri R. K. Gattani

SHRI N. G. BASAK

SHRI N. B. DESAI

SHRI P. J. JAGUS

SHRI R, L. KAPOOR

SHRI W. N. KARODE

SHRI R. KUNJITHAPATTAM

DIRECTOR

Members

In personal capacity (University of Roorkee, Roorkee 247667)

SHRI S. K. BANERJEE

SHRI J. K. PATEL ( Alternate )

RESEARCH OFFICER ( Alternate )

DEPUTY DIRECTOR ( C & MDD II )

SHRI R. K. VAISHNAVI ( Aliernate )

DR A. K. CHATTERJEE ( Alternatc )

ASSTT DIRECTOR ( PLASTIC ) ( Alternate ) JOINT DIRECTOR STANDARDS ( B & S ) (CB-1)

JOINT DIRECTOR, STANDARDS ( B & S )

SHRI T. MADNESHWAR ( Alternate )

CHIEF ENGINEER ( RESEARCH-CUM-DIRECTOR )

RESEARCH OFFICER ( CT ) ( Alternate )

National Test House, Calcutta Directorate General of Technical Development, New Delhi

Cement Manufacturers Association, Bombay Irrigation Department, Government of Punjab

Gujarat Engineering Research Institute, Vadodara

Maharashtra Engineering Research Institute, Nasik

Central Water Commission, New Delhi

Shree Digvijay Cement Co Ltd, Bombay

The Associated Cement Companies Ltd, Bombay

National Buildings Organization, New Delhi

Research, Designs and Standards Organization (Ministry of Railways), Lucknow

Roads Wing, Department of Surface Transport, Ministry of Transport, New Delhi

The Hindustan Construction Co Ltd, Bombay Chettinad Cement Corporation Ltd, Poliyur, Tamil Nadu Members

SHRI G. K. MAJUMDAR

DR IRSHAD MASOOD SHRI K. P. MOHIDEEN DR A. K. MULLICK DR (SMT) S. LAXMI (Alternate) Shri K. Naranappa Shri D. P. Kewalramani ( Alternate ) SHRI NIRMAL SINGH SHRI S. S. MIGLANI ( Alternate ) SHRI Y. R. PHULL SHRI S. S. SEEHRA ( Alternate ) SHRI A. V. RAMANA DR K. C. NARANG (Alternate) COL V. K. RAO SHRI N. S. GALANDE ( Alternate ) SHRI S. A. REDDI SHRI A. U. RIJHSINGHANI SHRI M. P. SINGH SUPERINTENDING ENGINEER ( D ) SENIOR DEPUTY CHIEF ENGINFER (GENERAL) (Alternate) SHRI S. B. SURI SHRI N. CHANDRASEKARAN ( Alternate ) Shri L. Swaroop SHRI H. BHATTACHARYA ( Alternate ) SHRI V. M. WAD

#### Representing

Hospital Services Consultancy Corporation (India) Ltd, New Delhi Central Building Research Institute (CSIR), Roorkee

Central Warehousing Corporation, New Delhi

National Council for Cement and Building Materials, New Delhi

Central Electricity Authority, New Delhi

Development Commissioner for Cement Industry (Ministry of Industry )

Central Road Research Institute (CSIR), New Delhi

Dalmia Cement ( Bharat ) Ltd, New Delhi

Engineer-in-Chief's Branch, Army Headquarters

Gammon India Ltd, Bombay Cement Corporation of India Ltd, New Delhi Federation of Mini Cement Plants, New Delhi Public Works Department, Govt of Tamil Nadu

Central Soil and Materials Research Station, New Delhi

Orissa Cement Ltd, New Delhi

Bhilai Steel Plant, Bhilai

## **Bureau of Indian Standards**

BIS is a statutory institution established under the Bureau of Indian Standards Act, 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

## Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publication), BIS.

## **Review of Indian Standards**

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards Monthly Additions'.

This Indian Standard has been developed from Doc: No. CED 2 (4767)

## **Amendments Issued Since Publication**

 Amend No.
 Date of Issue
 Text Affected

 BUREAU OF INDIAN STANDARDS
 BUREAU OF INDIAN STANDARDS

 Headquarters:
 Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
 Telegrams: Manaksanstha (Common to all offices)

 Regional Offices:
 Telephone

 Central
 : Manak Bhavan, 9 Bahadur Shah Zafar Marg
 323 76 17, 323 38 41

- Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. PATNA. PUNE. THIRUVANANTHAPURAM.

Printed by Reprography Unit, BIS, New Delhi