

*Indian Standard*  
CRITERIA FOR SAFETY AND DESIGN  
OF STRUCTURES SUBJECT TO  
UNDERGROUND BLASTS

( Second Reprint AUGUST 1997 )

UDC 699.84 : 624.131.551.2

© *Copyright* 1973

**BUREAU OF INDIAN STANDARDS**  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

# Indian Standard

## CRITERIA FOR SAFETY AND DESIGN OF STRUCTURES SUBJECT TO UNDERGROUND BLASTS

Earthquake Engineering Sectional Committee, BDC 39

*Chairman*

*Representing*

DR JAI KRISHNA

University of Roorkee, Roorkee

*Members*

DR A. S. ARYA

School of Research & Training in Earthquake Engineering, University of Roorkee, Roorkee  
Beas Designs Organization, Nangal

SHRI B. S. BHALLA

SHRI A. S. CHATRATH (*Alternate*)

SHRI H. M. CHAUDHARY

Directorate General of Observatories, Ministry of Transport and Aviation, New Delhi

DR S. M. K. CHETTY

Central Building Research Institute (CSIR), Roorkee

SHRI M. P. JAI SINGH (*Alternate*)

DEPUTY DIRECTOR, STANDARDS Ministry of Railways (RDSO)

(B & S) I

SHRI D. S. DESAI

SHRI C. P. GHOSH

SO2 (DESIGNS) (*Alternate*)

DR S. K. GUHA

SHRI S. BALASUBRAMANYAM (*Alternate*)

DR HARI NARAIN

M. N. Dastur & Co Pvt Ltd, Calcutta  
Engineer-in-Chief's Branch, Army Headquarters

Central Water & Power Commission, New Delhi

National Geo Physical Research Institute (CSIR), Hyderabad

SHRI HARSH K. GUPTA (*Alternate I*)

SHRI K. L. KAILA (*Alternate II*)

SHRI M. S. JALUNDEWALA Public Works Department, Government of Gujarat

SHRI N. G. VAKHARIA (*Alternate*)

SHRI M. G. JOSEPH

SHRI K. K. MADAN (*Alternate*)

SHRI V. S. KRISHNASWAMY

SHRI G. C. MATHUR

SHRI K. S. SRINIVASAN (*Alternate*)

SHRI M. A. MEHTA

SHRI T. M. MENON (*Alternate*)

SHRI G. C. MOMIN

SHRI K. B. GUHATHAKURTA (*Alternate*)

SHRI B. BALWANT RAO

SHRI P. K. THOMAS (*Alternate*)

Central Public Works Department

Geological Survey of India, Calcutta  
National Buildings Organization, New Delhi

Concrete Association of India, Bombay

Public Works Department, Assam

Ministry of Shipping & Transport (Roads Wing)

(Continued on page 2)

© Copyright 1973

BUREAU OF INDIAN STANDARDS

This publication is protected under the *Indian Copyright Act* (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

( *Continued from page 1* )

*Members*

SHRI P. S. SANDHAWALIA  
SHRI K. N. SINHA  
DR I. K. SHAH ( *Alternate* )  
DR P. SRINIVASULU  
DR A. N. TANDON  
SHRI D. AJITHA SIMHA,  
Director ( Civ Engg )

*Representing*

International Airport Authority of India, New Delhi  
Engineers India Ltd, New Delhi  
Structural Engineering Research Centre ( CSIR ),  
Roorkee  
In personal capacity ( B-7/50 Safdarjung Development  
Area, New Delhi 16 )  
Director General, ISI ( *Ex-officio Member* )

*Secretary*

SHRI V. SURESH  
Assistant Director ( Civ Engg ), ISI

**Blast Resistant Design of Structures Subcommittee, BDC 39 : 2**

*Convener*

DR A. S. ARYA  
School of Research & Training in Earthquake  
Engineering, University of Roorkee, Roorkee

*Members*

DR A. R. CHANDRASEKARAN  
School of Research & Training in Earthquake  
Engineering, University of Roorkee, Roorkee  
DR P. K. DUTTA  
Central Mining Research Station ( CSIR ),  
Dhanbad  
DR T. S. BAJPAYEE ( *Alternate* )  
SHRI C. P. GHOSH  
Engineer-in-Chief's Branch, Army Headquarters  
DR S. K. GUHA  
Central Water & Power Research Station, Poona  
SHRI N. M. RAMASWAMY  
Department of Atomic Energy  
DR V. S. BHAVNAGRI ( *Alternate* )  
SHRI K. K. SUD  
Ministry of Defence, New Delhi  
MAJ T. N. BALASUBRAMANIAM ( *Alternate* )  
SHRI N. S. VENKATESAN  
Terminal Ballistics Research Laboratory, Chandigarh  
SHRI P. K. MISRA ( *Alternate* )

*Indian Standard*  
CRITERIA FOR SAFETY AND DESIGN  
OF STRUCTURES SUBJECT TO  
UNDERGROUND BLASTS

**0. FOREWORD**

**0.1** This Indian Standard was adopted by the Indian Standards Institution on 24 March 1973, after the draft finalized by the Earthquake Engineering Sectional Committee had been approved by the Civil Engineering Division Council.

**0.2** Underground blasting operations have become almost a must for excavation purposes. It is of utmost importance to define the damage criterion in terms of maximum permissible vibrations for the safety of nearby structures during underground explosions.

**0.3** This standard is intended for the safety of normal structures on/in more or less homogeneous medium. It covers the criteria for safety of such structures from cracking and also specifies the effective accelerations for their design in certain cases. In the case of important structures or complex soil and rock conditions, monitoring of vibrations is suggested.

**0.4** If the existing structures have cracks and other defects due to various causes before blasting operations are carried out, further damage could occur during blasting. It would, therefore, be desirable to carry out survey of such defects in nearby structures before undertaking blasting operations and fix appropriate telltales across old cracks for monitoring widening of cracks, if any.

**0.5** It is assumed that adequate precautions will be taken against flying debris due to the underground blast by installing shielding devices above the blast area.

**0.6** This standard is based on the currently accepted principles and practices in this field in this country and in other countries of the world. In the formulation of this standard due weightage has been given to international literature on the subject.

**0.6.1** For evaluating the effective charge per delay, while using milli-second detonators, reference may be made to 'LONGEFORS (S.L) and KIHLMSTROM (B)'. Modern techniques of rock blasting, 1963. John Wiley and Sons, New York' (see 4.2.2.2).

## 1. SCOPE

**1.1** This standard deals with the safety of structures during underground blasting and is applicable to normal structures like buildings, elevated structures, bridges, retaining walls, concrete and masonry dams constructed in materials like brickwork, stone masonry and concrete.

## 2. TERMINOLOGY

**2.0** For the purpose of this code, the following definitions shall apply.

**2.1 Charge** — An explosive used in blasting in rock excavations and quarry blasts. Straight dynamite containing nitroglycerin ( 60 percent ), sodium nitrate, wood meal and an antacid is the most common explosive used in blasting and the same is considered in this code.

**2.2 Underground Blasting** — Detonation of explosive in drill holes and bore holes for rock excavation and quarry blasts.

**2.3 Detonator** — Device used for exploding the charge.

**2.4 Delay Datonator** — Device for exploding charge in two or more volleys with one application of electric current.

**2.5 Natural Frequency of Structure ( N )** — Frequency at which the amplitude of vibrations of the structure becomes maximum when forces of different frequencies and of same magnitude are applied.

**2.6 Frequency of Ground Motion ( f )** — Predominant frequency in the seismic waves produced due to underground explosion.

**2.7 Damping** — The effect of internal friction, imperfect elasticity of material, slipping, sliding, etc, in reducing the amplitude of vibrations. It is expressed as a fraction of critical damping.

**2.8 Critical Damping** — The damping beyond which the motion will not be oscillatory.

**2.9 Hard Rocks** — Granite, basalt, quartzite, marble, crystalline schists, massive slates and other hard massive crystalline rocks.

**2.10 Soft Rocks** — Shale, sandstone phyllites, laminated slates, mica schist, weathered hard rocks and other soft rock material.

**2.11 Threshold Damage** — Formation of new plaster cracks, widening of old cracks.

## 3. GENERAL PRINCIPLES

**3.1** Underground explosions cause movement of ground on which the structure is situated which sets the structure into vibrations. These vibrations

can be resolved in three mutually perpendicular directions, longitudinal, transverse horizontal and transverse vertical. Usually the transverse horizontal component is much smaller than the other two. The longitudinal and transverse vertical components are comparable in magnitude, therefore either of the two could be taken as a measure of the safety criteria.

**3.2** The parameters associated with ground particle vibrations are acceleration, velocity and displacement and their respective frequencies. It is observed that the peak ground particle velocity in the medium at the site of the structure represents a good general index of damage independent of the frequency. It may, therefore, be adopted for specifying the safety criteria against threshold damage.

**3.3** The ground particle velocity ( $v$ ) at any point mainly depends on the amount of charge exploded, distance between the shot point and the station of observation and the local geology of the medium. The other less important variables are the explosives used, its coupling state with the surrounding medium and structural peculiarities of the medium, which generally do not figure in velocity charge distance relationship.

**3.4** The threshold of human perception of vibrations is far below the threshold of damage, whereas the vibrations become intolerable at ground velocities higher than the velocity of threshold damage. Therefore, if the vibrations are kept below threshold of damage, they though perceptible, will not be intolerable to human beings.

**3.5** At short range a wave radiates spherically and the amplitude of vibration diminishes approximately inversely as the distance. At long range, the wave splits into different types travelling at different speeds and variations in medium cause scattering. Geological discontinuities, such as faults may prevent propagation in a particular direction.

**3.6** As the range increases, the charge required to cause damage increases and also the duration of vibration increases with the result that the area of damage in the structure would increase. For large charges and long ranges, an earthquake type analysis will be appropriate using response spectra for the ground motion caused by underground blast.

**3.7** The response of a structure to the ground vibration, as mentioned in **3.6**, is a function of the natural frequency of the structure ( $N$ ), frequency of ground motion ( $f$ ), the damping in the material of the structure and duration and the intensity of ground vibration. It may be assumed that resonance is not likely to occur since the explosion causes impulsive ground motion which is complex and irregular in character, changing in frequency and amplitude and lasting for small durations.

#### **4. SAFETY CRITERIA AGAINST THRESHOLD DAMAGE**

**4.1 Assessment of Ground Particle Velocity** — The value of ground

particle velocity may be computed from the following expression:

$$v = K_1 \left( \frac{Q^{2/3}}{R} \right)^{1.25}$$

where

- $v$  = ground particle velocity in mm/s,
- $K_1$  = constant which may be normally taken as given in the Note,
- $Q$  = charge per delay in kg, and
- $R$  = distance from blast point in m.

NOTE — Value of  $K_1$  — Soils, weathered or soft rock = 880; and hard rock = 1 400.

#### 4.1.1 Safe Ground Particle Velocity ( $v$ )

4.1.1.1 For safety of structures from threshold damage, the ground particle velocity ( $v$ ) as computed from 4.1 shall not exceed the following values:

- a) Soils, weathered or soft rock 50 mm/s
- b) Hard rock 70 mm/s

4.1.1.2 Where monitoring of ground particle velocity by means of suitable instruments is adopted as a means of vibration control, the peak ground particle velocity may not exceed the following:

- a) Soils, weathered or soft rock 70 mm/s
- b) Hard rock 100 mm/s

NOTE 1 — The safe values of  $v$  given in 4.1.1.1 and 4.1.1.2 are lower than those which may be intolerable to human beings.

NOTE 2 — These values are appropriate for masonry and will be conservative for concrete of M 150 quality.

## 4.2 Safe Distance from Blast

4.2.1 For charges up to 100 kg per delay, the safe distance of the structure from the blast point may be obtained from Fig. 1.

4.2.2 If the delay time  $\tau \geq R/4C$  the ground motions are governed by the total charge weight in a single delay,

where

- $\tau$  = delay time in seconds,
- $R$  = distance from the blast point in m, and
- $C$  = longitudinal seismic wave velocity of the medium in m/s (see 4.2.2.1).

NOTE — If the delay time is less than that given in 4.2.2, the designer may look for references.

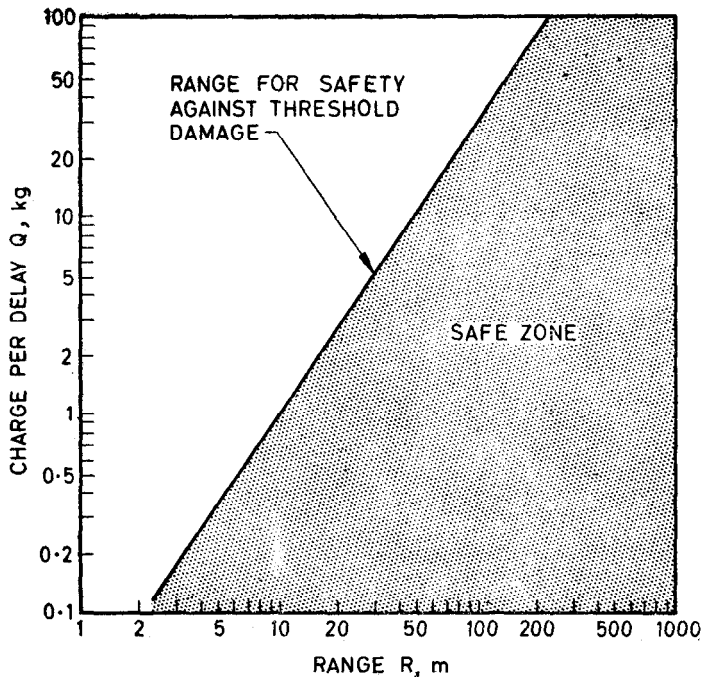


FIG. 1 CHARGE PER DELAY AS A FUNCTION OF RANGE  $R$  FOR SAFETY AGAINST DAMAGE DURING UNDERGROUND BLASTING

**4.2.2.1** In the absence of actual data the values of longitudinal seismic wave velocity may be taken as follows:

| Type of Medium           | Velocity $C$ in m/s | Range of $C$   |
|--------------------------|---------------------|----------------|
| Soils                    | 1 000               | 200 to 1 800   |
| Weathered and soft rocks | 2 500               | 1 800 to 3 200 |
| Hard rock                | 5 000               | 3 200 to 7 500 |

**4.2.2.2** When use of millisecond delay detonators is contemplated for reduction of ground motion, the effective charge per delay may be computed as per accepted practice. However, for any combination of frequency and scattering time, the reduction factor may not be taken less than 0.5 (see 0.6.1).

## 5. GROUND ACCELERATION FOR DESIGN

**5.1** For large charges more than 100 kg/delay, where the safety criteria against threshold damage given in 4 are violated and it is desired to design



structures for seismic effects of the blasts, the following equation may be used for finding the design acceleration in the horizontal direction:

$$\frac{a}{g} = \frac{K_2 Q^{0.83}}{R^2}$$

where

- $a$  = design acceleration in  $\text{cm/s}^2$ ;
- $g$  = acceleration due to gravity in  $\text{cm/s}^2$ ;
- $K_2$  = constant ( which may be taken as 4 for soil, weathered and soft rock and 6 for hard rock );
- $Q$  = charge per delay in kg; and
- $R$  = distance of structure from blast point in m.

**5.1.1** The design acceleration so obtained should be uniformly applied to the structure.

## 6. MONITORING

**6.1** Monitoring of ground vibrations may be necessary for various reasons as follows:

- a) To determine by pilot tests, the maximum charge  $Q$  that may be used in blasting operations to keep the ground particle velocity at the site of structures within the safe values given in **4.1.1.1** or for determining the accelerations for design;
- b) To determine by pilot tests the constant  $K_2$  to be used in **5.1** and longitudinal wave velocity for use in **4.2.2**; and
- c) To control the charge during actual excavation operations by keeping the ground particle velocity within the safe values given in **4.1.1.2**. This will particularly be useful for excavations in built up areas.

**6.2** For measurement of ground vibrations, three types of instruments could be used, namely, accelerometer, velocity pick up or displacement meter. Of the three, the velocity pick up will be most appropriate for small charges and short ranges and the accelerometer for large charges and long ranges. The frequency response of velocity measurement should be flat above 10 c/s and in the case of acceleration measurement it should be flat in the range 0 to 100 c/s.

**6.2.1** Where a threshold ground velocity is specified, peak velocity sensors could be used which would activate a warning system, either visual in the form of light indication or sound in the form of alarm.

**6.3** In case a displacement meter is used, the peak ground particle velocity shall be obtained from the displacement vs time record by measuring the maximum-slope of the curve.

**6.4** Subsidence of the structure could also be monitored.

## BUREAU OF INDIAN STANDARDS

### Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones: 323 0131, 323 3375, 323 9402

Fax : 91 11 3234062, 91 11 3239399, 91 11 3239382

Telegrams : Manaksanstha

(Common to all Offices)

Telephone

### Central Laboratory :

Plot No. 20/9, Site IV, Sahibabad Industrial Area, Sahibabad 201010

8-77 00 32

### Regional Offices:

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

323 76 17

\*Eastern : 1/14 CIT Scheme VII M, V.I.P. Road, Maniktola, CALCUTTA 700054

337 86 62

Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160022

60 38 43

Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600113

235 23 15

†Western : Manakalaya, E9, Behind Marol Telephone Exchange, Andheri (East),  
MUMBAI 400093

832 92 95

### Branch Offices::

'Pushpak', Nurmohamed Shaikh Marg, Khanpur, AHMEDABAD 380001

550 13 48

‡Peenya Industrial Area, 1st Stage, Bangalore-Tumkur Road,  
BANGALORE 560058

839 49 55

Gangotri Complex, 5th Floor, Bhadbhada Road, T.T. Nagar, BHOPAL 462003

55 40 21

Plot No. 62-63, Unit VI, Ganga Nagar, BHUBANESHWAR 751001

40 36 27

Kalaikathir Buildings, 670 Avinashi Road, COIMBATORE 641037

21 01 41

Plot No. 43, Sector 16 A, Mathura Road, FARIDABAD 121001

8-28 88 01

Savitri Complex, 116 G.T. Road, GHAZIABAD 201001

8-71 19 96

53/5 Ward No.29, R.G. Barua Road, 5th By-lane, GUWAHATI 781003

54 11 37

5-8-56C, L.N. Gupta Marg, Nampally Station Road, HYDERABAD 500001

20 10 83

E-52, Chitaranjan Marg, C-Scheme, JAIPUR 302001

37 29 25

117/418 B, Sarvodaya Nagar, KANPUR 208005

21 68 76

Seth Bhawan, 2nd Floor, Behind Leela Cinema, Naval Kishore Road,  
LUCKNOW 226001

23 89 23

NIT BUilding, Second Floor, Gokulpat Market, NAGPUR 440010

52 51 71

Patliputra Industrial Estate, PATNA 800013

26 23 05

Institution of Engineers (India) Building 1332 Shivaji Nagar, PUNE 411005

32 36 35

T.C. No. 14/1421, University P. O. Palayam, THIRUVANANTHAPURAM 695034

6 21 17

---

\*Sales Office is at 5 Chowringhee Approach, P.O. Princep Street,  
CALCUTTA 700072

27 10 85

†Sales Office is at Novelty Chambers, Grant Road, MUMBAI 400007

309 65 28

‡Sales Office is at 'F' Block, Unity Building, Narashimaraja Square,  
BANGALORE 560002

222 39 71