

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 5369 (1975): General Requirements for Plain Washers and Lock Washers [PGD 31: Bolts, Nuts and Fasteners Accessories]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



Indian Standard

GENERAL REQUIREMENTS FOR
PLAIN WASHERS AND LOCK WASHERS

(First Revision)

1. Scope — Covers the general requirements and permissible deviations for plain washers, lock washers and similar parts.

2. Grades — Two grades of washers are specified, namely, Precision and Ordinary.


3. Dimensional Accuracy

3.1 The permissible deviations on the main dimensions and concentricity of the hole with respect to the outside diameter of the precision grade washers shall be as specified in Tables 1 and 2.

3.2 The permissible deviations on the main dimensions and concentricity of the hole with respect to the outside diameter of the ordinary grade washers shall be as specified in Tables 3 and 4.

TABLE 1 PERMISSIBLE DEVIATIONS FOR PRECISION WASHERS
(Clause 3.1)

All dimensions in millimetres.

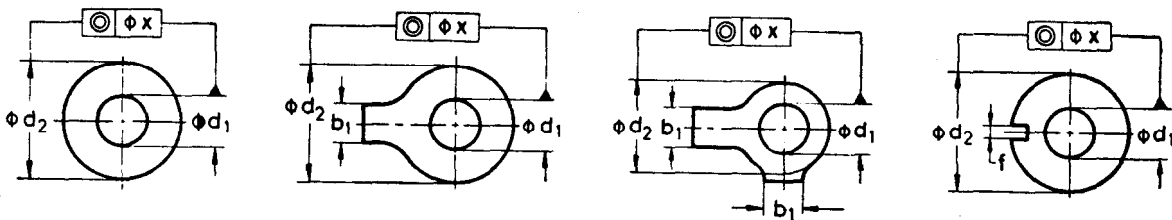

Reference Dimension		Permissible Deviation (Tolerance Zone)				Permissible Deviation on Concentricity x^\dagger
Over	Up to	b_1	d_1^*	d_2	Lock Width f	
—	3	—	H13	h14	h13	2 IT12 2 IT12 2 IT12
3	6	h14	H13	h14	h13	
6	10	h14	H13	h14	h13	
10	18	h14	H14	h14	h13	2 IT12 2 IT12 2 IT12
18	30	h14	H14	h14	h13	
30	50	h14	H14	h14	h13	
50	80	—	H14	h15	—	2 IT13 2 IT13 2 IT13
80	120	—	H14	h15	—	
120	180	—	H14	h15	—	
180	250	—	—	h15	—	2 IT13

*In case of punched holes the tolerance zones H13 and H14 for the hole diameter do not apply to the punch exit side of the washers.


†For calculating the magnitude of the concentricity tolerance, the reference dimension shall be d_2 .

Bolts, Nuts and Fasteners Accessories Sectional Committee, EDC 27 [Ref : Doc : EDC 27 (2388)]

TABLE 2 PERMISSIBLE DEVIATIONS FOR THICKNESS, PARALLELISM AND FLATNESS FOR PRECISION WASHERS

(Clause 3.1)

All dimensions in millimetres.




Washer Thickness s		Permissible Deviation for Thickness s	Permissible Deviation in Parallelism of Bearing Faces t	Flatness Tolerance e
Over	Up to			
—	1	± 0.1	0.05	0.1
1	2.5	± 0.2	0.1	0.2
2.5	4	± 0.3	0.15	0.3
4	6	± 0.6	0.2	0.4
6	10	± 1	0.3	0.6
10	18	± 1.2	0.4	1

TABLE 3 PERMISSIBLE DEVIATIONS FOR ORDINARY WASHERS

(Clause 3.2)

All dimensions in millimetres.

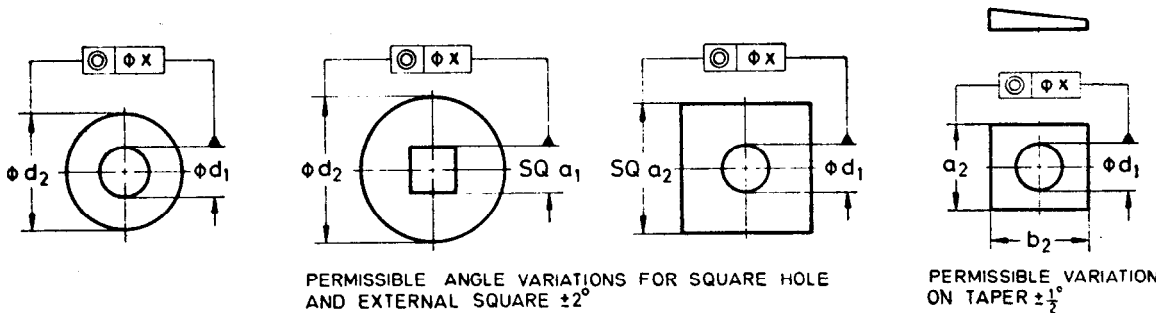

Reference Dimension		Permissible Deviation (Tolerance Zone)					Permissible Deviation on Concentricity $x \dagger$
Over	Up to	a_1	a_2	b_2	d_1^*	d_2	
3	6	H15	—	—	H14	—	2 IT16 2 IT16 2 IT16
6	10	H15	—	—	H14	h16	
10	18	H15	± 1	—	H14	h16	
18	30	H15	± 2	js16	H14	h16	2 IT16 2 IT16 2 IT17
30	50	—	± 2.5	js16	H15	h16	
50	80	—	± 3	js16	H15	h16	
80	120	—	± 4	—	H15	h16	2 IT17 2 IT17 2 IT17
120	180	—	± 5	—	H15	h16	
180	250	—	—	—	—	h16	


*In case of punched holes the tolerance zones H14 and H15 for the hole diameter do not apply to the punch exit side of the washers.

†For calculating the magnitude of the concentricity tolerance, the reference dimension shall be d_2 .

TABLE 4 PERMISSIBLE DEVIATIONS FOR THICKNESS, PARALLELISM AND CONVEXITY FOR ORDINARY WASHERS

(Clause 3.2)

All dimensions in millimetres.



Washer Thickness <i>s</i>		Permissible Deviation for Thickness <i>s</i>	Permissible Devia- tion in Parallelism of Bearing Faces <i>t</i>	Flatness Tolerance <i>e</i>
Over	Up to			
—	1	± 0.2	0.2	0.2
1	2.5	± 0.3	0.2	0.4
2.5	4	± 0.6	0.3	0.6
4	6	± 1	0.5	0.8
6	10	± 1.2	0.6	1.2
10	18	± 1.5	1.0	2.0

4. Material — The material of plain washers and lock washers shall be according to the respective product standard.

5. Finish — The plain washers and lock washers shall be supplied in natural finish unless otherwise specified by the purchaser. At the request of the purchaser, washers may be phosphate-coated, nickel-plated, tinned, galvanized, copper-plated or cadmium-coated. In such cases, the dimensions of the washers shall apply before coating. The properties of the washer shall not, however, be impaired by the protective coating specified by the purchaser.

6. Other Requirements

6.1 The washers shall be free from cracks, burrs, pits and other defects. All sharp edges shall be removed. In particular, precision grade washers shall not have any tool marks.

6.2 The supply requirements in the case of metallic washers shall conform to IS: 1387-1967 'General requirements for the supply of metallurgical materials (first revision)'.

7. Sampling and Acceptance — The sampling procedure for the testing and inspection of washers shall be in accordance with IS: 6821-1973 'Methods for sampling non-threaded fasteners'.

8. Testing of Material and Coating — The material constituting the washers and lock washers has to be tested only if special requirements are specified for the material; similarly it applies to testing of coating.

9. Packing — Unless otherwise specified the precision grade washers shall be packed in cartons of 100, 500 and 1000 or multiples thereof. The ordinary grade washers shall be packed in cartons of 2.5 kg, 5 kg or bags of 50 kg. Each carton or bag shall contain washers of one size only.

10. Marking — The label on the carton or bag shall carry the size, number of pieces and the manufacturer's mark or trade-mark.

10.1 Certification Marking — Details available with the Bureau of Indian Standards.

EXPLANATORY NOTE

This standard was first published in 1969. In the present revision the changes and additions made are enumerated below:

- a) 'Bright' and 'Black' washers have been re-designated as 'Precision' and 'Ordinary' washers respectively. The new designations correspond more closely to the practical situation.
- b) The old terms 'bright' and 'black' no longer have any justification, since depending on the manufacturing method and intermediate material like coating, a washer described as 'bright' or 'black' need not be so in appearance.
- c) The permissible dimensional, positional and form variations specified in the earlier version have been altered and conform to ISO tolerances, and the method of representation also follows the international system.
- d) A clause is also included on testing of material and coating. It may be added that testing of material in the case of washer is rarely necessary unless in exceptional circumstances, for example, when special requirements are to be met by the material.
- e) The clause on packing has been revised making a distinction between packing 'ordinary' and 'precision' washers.

In the preparation of this standard, considerable assistance has been derived from DIN 522 Scheiben; Technische Lieferbedingungen (Washers, technical conditions of delivery), 1974 issued by Deutsches Institut für Normung (DIN).