

इंटरनेट

मानक

### Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 7784-1 (1993): Design of cross drainage works- Code of practice, Part 1: General features [WRD 13: Canals and Cross Drainage Works]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”



BLANK PAGE



भारतीय मानक

आर पार जल निकास कार्यों के डिजाईन — रीति संहिता

भाग 1 सामान्य लक्षण

( पहला पुनरीक्षण )

*Indian Standard*

DESIGN OF CROSS DRAINAGE WORKS —  
CODE OF PRACTICE

PART 1 GENERAL FEATURES

( *First Revision* )

UDC 626.861.1 : 006.76

© BIS 1993

BUREAU OF INDIAN STANDARDS  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

## FOREWORD

This Indian Standard was adopted by the Bureau of Indian Standards, after the draft finalized by the Cross Drainage Works Sectional Committee had been approved by the River Valley Division Council.

Cross drainage works are structures which are constructed to negotiate an aligned carrier channel/canal over, below or at the same level of a drainage or another carrier channel/canal.

The code of practice for design of cross drainage works is formulated in two parts, Part 1 dealing with general features and Part 2 with specific requirements, for various types of cross drainage works.

This standard was first published in the year 1975. Based on the experience of various departments including Central Water Commission and Irrigation Department, a need was felt to make its provisions up-to-date, and hence, this revision has been prepared. The principal modifications are in respect of correcting the terminology of some of the terms and covering it separately [ see IS 4410 ( Part 15/Sec 5 ) : 1992 ] categorizing the various cross drainage works as is being done in practice, arriving at design flood, loss of head etc. The modifications made in this standard are based on the suggestions received from various states thus making the provisions more clear and in line with the practice being followed in this country by major states.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values ( revised )'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

# Indian Standard

## DESIGN OF CROSS DRAINAGE WORKS — CODE OF PRACTICE

### PART 1 GENERAL FEATURES

( *First Revision* )

#### 1 SCOPE

1.1 This standard (Part 1) covers general features pertinent to the design of various types of cross drainage works and incorporates investigations and studies connected therewith.

#### 2 REFERENCES

2.1 The Indian Standards listed in Annex A are necessary adjuncts to this standard.

#### 3 TERMINOLOGY

3.0 For the purpose of this standard, the definitions given in IS 4410 (Part 11/Sec 5) : 1977 and IS 4410 (Part 15/Sec 5) : 1992 will apply.

#### 4 CATEGORIES OF CROSS DRAINAGE WORKS

4.0 Cross drainage works can be classified under the three broad categories listed at 4.1 to 4.3, based on the type of the structure to negotiate a canal over, below or at the same level of the drainage channel.

##### 4.1 Structures for Canal Over a Natural Drainage Channel

The structures falling under this category are aqueducts, syphon aqueducts and culverts. Maintenance of structures in this category is relatively more convenient, as these are generally above the ground and hence open for inspection.

##### 4.2 Structures for Canal Underneath a Natural Drainage Channel

The structures falling under this category are superpassages and syphons including well syphons. In case of syphons the maintenance is difficult as these run below the natural drainage channel and are, therefore, not easily accessible to inspection.

##### 4.3 Structures for Canal Crossing a Natural Drainage Channel at the Same Level

Structures falling under this category are level crossings and inlets, with or without escapes.

NOTE — Wherever the word 'canal' is used, it should be meant as 'canal/carrier channel'.

#### 5 SELECTION OF THE TYPE OF CROSS DRAINAGE WORK

5.1 While aligning the canal, the type of cross drainage work envisaged should always be kept in view. The economics of various types of cross drainage works *vis-a-vis* alternative alignments should be considered

before deciding upon the site and type of crossing. As a general guide, for deciding upon the type of the cross drainage work, important considerations are as given below:

- a) Full supply level and functions of canal — *vis-a-vis* high flood level of the drainage channel,
- b) Topography of terrain,
- c) Regime of the stream,
- d) Foundation strata,
- e) Dewatering requirements,
- f) Ratio of design flood to be provided in drainage channel to the discharge in the canal, and
- g) Envisaged head loss.

##### 5.1.1 Full Supply Levels of Canal *vis-a-vis* High Flood Level (HFL) of Drainage Channel

The choice of any particular type of cross drainage work is dependent on the high flood level (HFL) in the drainage channel to be negotiated. Aqueducts are generally proposed when the bed level of canal is well above the HFL of the drainage channel. Superpassages are generally proposed when the full supply level (FSL) of the canal is well below the bed level of the drainage channel. When the bed level of the canal is at, or below, the HFL of the drainage channel, the depression of the bed of the drainage channel is often a more economical proposal and in such cases syphon aqueducts may be considered.

##### 5.1.2 Topography of Terrain

Detailed examination of the topography of the terrain is essential to locate a stable reach of the drainage channel with good foundations permitting, preferably, a right-angle crossing. Topography of the terrain may also permit diversion of one channel into another and locating the cross drainage work below the confluence of the two channel for greater economy.

##### 5.1.3 Regime of Drainage Channel

The regime of a drainage channel requires careful examination. For drainage channel carrying high sediment charges or drift materials, the possibility of choking up of the syphon and the effect of fluming of the drainage channel should be kept in view.

##### 5.1.4 Foundation Strata

The selection of the most suitable site and a good design, for any cross drainage work is intimately related to the engineering properties of the foundation

sub-strata at various alternative sites. These properties have, therefore, to be determined by site explorations. Where an alternative site, meeting other criteria, is available, the final choice would obviously depend on the location where the sub-strata available close to the bed of the stream is firm.

#### 5.1.5 Dewatering Requirements

In the execution of foundation works for cross drainage structures dewatering of foundations may pose serious problems. An accurate estimate of the cost and procedure of dewatering requires to be carefully worked out when designs involve laying of foundations below the ground water table.

#### 5.1.6 Ratio of Design Flood in Drainage Channel to the Discharge in Canal

Negotiating a canal below the drainage channel is generally more difficult and involves more head loss. However, if the topography and other features warrant a choice to be made between canal syphon and syphon aqueduct, then canal syphon may be preferred, only if the ratio of canal discharge to the design flood is substantially low.

#### 5.1.7 Envisaged Head Loss

The choice of any particular type of cross drainage work is also dependent on the head loss that can be permitted in the canal. Whereas higher head loss can throw some area out of command, restriction on head loss may necessitate provision of wider sections making the structure costly.

### 6 DATA REQUIREMENT

6.1 For any type of cross drainage work some data is required which is common to all types of cross drainage works. A location map for the work with results of subsurface exploration conducted at site, cross sections of the stream, upstream and downstream of the proposed site, should be prepared, as given in 6.2 to 6.9.

6.2 An index map to a suitable scale showing the recommended location of the cross drainage structure, the alternative sites of crossings investigated and rejected, the existing communications, the general topography of the country and the important habitations in the vicinity.

6.3 A catchment area map to a suitable scale, with contour markings at suitable intervals showing the main drainage channel from its sources together with all its tributaries. The map should also show the various locations of rain gauge stations, gauging sites, etc, as also the general soil types and land use (that is forests, cultivated and uncultivated areas). The hydrological observation sites should also be marked. Existing, under construction or proposed embankments and flood management measures should also be shown.

6.4 A detailed survey plan of the drainage channel to suitable scale showing important topographical features extending considerable distances, downstream and upstream, of the proposed site of crossing and either of its banks.

6.5 A site plan to a suitable scale showing details of the

site selected and extending upstream and downstream, of the centre line of the proposed crossing and covering its approaches to sufficient distances, so as to demarcate levels, cadastral survey plot numbers, important topographical features like depressions near the proposed alignment of canal, general sub-soil water levels (with slope, if possible), etc.

6.5.1 The other requirements for the plan at 6.5 are:

- a) reference to the position of the bench-mark used as datum with its full description and reduced level;
- b) the lines and identification numbers of the cross sections and longitudinal sections of drainage channel taken within the scope of site plan and exact locations of their extreme points;
- c) the locations of the various trial pits and/or borings with their identification numbers;
- d) The contour of the drainage channel at intervals between 0.5 m to 1.5 m depending upon the terrain. This interval may be greater in mountainous regions;
- e) The direction of flow of water;
- f) The angle of direction of crossing; and
- g) Cross alignment of canal further upstream for some distance beyond the limits of cross drainage works.

6.6 A cross section of the drainage channel at the proposed site of the crossing to appropriate vertical and horizontal scales indicating the following information:

- a) Cross section covering the bed and banks of the channel portion and the ground levels beyond the banks covering the entire flood plane, or from ridge to ridge at close intervals to sufficient distances on either side showing all uneven features and habitations, if any;
- b) Nature of the soil in bed, banks and approaches, with trial pit or bore-hole sections showing the levels and natures of the various strata down to stratum suitable from foundation considerations and from considerations of safe bearing capacity of soil;
- c) Low-water level; and
- d) Maximum flood level.

6.7 Longitudinal section of the drainage channel covering a reasonable reach to suitable scale, showing the location of the cross drainage work, with levels of the observed flood, the low water and the bed levels at suitably spaced intervals along the line of the deep water channel.

6.8 A note giving the salient features relating to the catchment area, the meteorological conditions experienced thereon, besides the following other points:

- a) Any predictable (future) alteration in the land use;
- b) Storages in the catchment (artificial or natural)

and embankment breaches that have occurred in the past;

- c) Short duration intensity and frequency data in respect of rainfall in the catchment;
- d) Liability of the site to seismic disturbances;
- e) Likelihood of heavy sediment charge or floating timber;
- f) Particulars of foundation exploration data incidental to design requirements; and
- g) Recuperation tests, where foundation depth is more than 3 m below the water table and where the strata are pervious.

**6.9** A note giving the salient design features of structures existing upstream or downstream of the proposed site.

**6.9.1** Presence of dams, barrages, weirs, etc, on the natural drainage channel in the vicinity either upstream or downstream, may affect the hydraulic characteristics of the natural drainage channel, like obliquity and concentration of flow, scour, silting of bed, change in bed levels, flood levels, etc. These effects should be considered in the design of the cross drainage work.

**6.10** For preparing the design of a cross drainage structure, the following specified hydraulic data should also be made available.

#### 6.10.1 Canal

1. Full supply discharge,  $Q$ ;
2. Bed width;
3. Full supply depth;
4. Water surface slope;
5. Bed level;
6. Bed slope;
7. Full supply level;
8. Top of bank level;
9. Cross section of canal showing Natural Ground Level;
10. Subsoil water level; and
11. Nature of bed material and value of 'n' (rugosity coefficient in Manning's formula).

#### 6.10.2 Drainage Channel

1. Extent and nature of drainage area (catchment area);
2. Maximum annual rainfall and the period (years) of data;
3. Maximum intensity of rainfall with year;
4. Maximum observed flood discharge at the site;
5. Maximum flood level;
6. Water surface slope;
7. Site plan of proposed crossing including contours;
8. Log of borehole or trial pit data;
9. Type of bed load of drainage channel;
10. Longitudinal section of the stream for suitable distance upstream and downstream of the canal depending upon site conditions;
11. Cross section of the drainage channel for a distance 100 m to 300 m upstream and downstream, at intervals of 10 m to 50 m;
12. Waterways provided in road and railway bridges or other hydraulic structures on the drainage channel;
13. Spring water level at the crossing site in May and October; and
14. Silt factor.

### 7 DESIGN FLOOD FOR DRAINAGE CHANNEL

**7.1** Design flood for drainage channel to be adopted for cross drainage works should depend upon the size of the canal, size of the drainage channel and location of the cross drainage. A very long canal, crossing a drainage channel in the initial reach, damage to which is likely to affect the canal supplies over a large area and for a long period, should be given proper weightage.

**7.2** Cross drainage structures are divided into four categories depending upon the canal discharge and drainage discharge. Design flood to be adopted for these four categories of cross drainage structures is given in Table 1.

**Table 1 Design Flood Values**  
(Clauses 7.2 and 7.4)

Category of Structure	Canal Discharge in $m^3/sec$	*Estimated Drainage Discharge in $m^3/sec$	Frequency of Design Flood
A	0-0.5	All discharges	1 in 25 years
B	0.5-15	0-150 Above 150	1 in 50 years 1 in 100 years
C	15-30	0-100 Above 100	1 in 50 years 1 in 100 years
D	Above 30	0-150 Above 150	1 in 100 years As per Note 2

#### NOTES

- 1 The design flood to be adopted as mentioned in this table should in no case, be less than the observed flood.
- 2 In case of very large cross drainage structures where estimated drainage discharge is above 150 cumecs and canal design discharge is more than 30 cumecs, the hydrology should be examined in detail and appropriate design flood adopted, which should in no case be less than 1 in 100 years flood.

\*This refers to the discharge estimated on the basis of river parameters corresponding to maximum observed flood level.



**7.3** Where possible, the discharges determined by different methods mentioned in IS : 5477 (Part 4) : 1971 should be compared to see if any large variations are exhibited and the most reasonable value, giving weightage to the one based on observed data, should be adopted. Where there are cross drainage works already existing on the same drainage channel, full data regarding the observed flood should be obtained and the new cross drainage works designed, with such modifications in the design flood as may be considered necessary.

**7.4** To safeguard against unforeseen nature of flood intensities the foundation of the cross drainage structure should be checked for a check flood discharge of value twenty percent higher than the design flood given in Table 1.

## 8 HYDRAULIC DESIGN ASPECTS

### 8.1 Waterway

**8.1.1** Waterway for a cross drainage work is fixed from hydraulic and economic considerations with particular reference to:

- a) design flood,
- b) topography of the site,
- c) existing and proposed section and slope of the drainage channel in the vicinity of the crossing,
- d) permissible afflux, and
- e) construction and maintenance aspects.

**8.1.2** In plains, the drainage channels are generally in alluvium and the waterway usually provided in works without rigid floor is about sixty to eighty percent of the perimeter, given by Lacey's formula:

$$P_w = C [Q]^{1/2}$$

**Table 2 Maximum Permissible Velocities,**  
( Clause 8.1.2.2 )

SI No.	Types of Floors	Maximum Permissible Velocity
(1)	(2)	(3) m/s
i)	Metals face (steel and cast iron lined)	10
ii)	Face of concrete grade M 30 and above - grade below M 30	6 4
iii)	Stone masonry face with cement pointing	3
iv)	Stone masonry face with cement plaster	4
v)	Brick masonry face with cement plaster	2.5
vi)	Brick masonry with cement pointing	2
vii)	Hard rock	4
viii)	Murum	1.5-2
ix)	Soil silt	0.7-1

#### NOTES

- 1 When the flow carries abrasive materials with it, the permissible values may be further reduced by 25%.
- 2 Hard steel troweling, power floating, smooth surface finish and continuous long curing can have higher abrasion resistance, and higher velocities than that given in this table can be permitted, for surface using cement.

where

$P_w$  = wetted perimeter in m;

$C$  = a coefficient varying from 4.5 to 6.3 according to local conditions, the usual value adopted being 4.8 for regime channel; and

$Q$  = design flood in  $m^3/s$ .

**8.1.2.1** The value of wetted perimeter obtained from 8.1.2 is the total waterway between the two faces of the abutments.

**8.1.2.2** In works with rigid floors, however, waterway can be further flumed within the permissible limits of velocity negotiated through the available ventages. Ordinarily such velocities should be limited to the values given in Table 2.

**8.1.3** For sub-mountainous and mountainous terrains with flashy flows, the waterway is provided within the width of the existing stream. Where the slope of the natural drainage channel is quite steep suitable methods may be adopted to bring the velocity within the desired limits.

**8.1.4** The minimum dimension of openings should be such as to permit, as far as possible, manual clearing of deposits therein.

### 8.2 Clearance for Aqueducts

#### 8.2.1 Rectangular Openings

The clearance will depend upon the relative levels of the canal bed and high flood level of the drainage channel. Values given in Table 3 are suggested as suitable minimum clearances (taking into account allowable afflux) for purposes of design, where available.

Table 3 Minimum Vertical Clearances for Rectangular Openings

SI No. (1)	Design Flood (2) m <sup>3</sup> /s	Minimum Vertical Clearance (3) mm
i)	Below 3	450
ii)	3 and above but below 30	600
iii)	30 and above but below 300	900
iv)	300 and above but below 3 000	1 200
v)	3 000 and above	1 500

**8.2.1.1** If the minimum clearances specified in Table 3 are not available; safety of the superstructure should be ensured against likely repercussions.

### 8.2.2 Arch Openings

Minimum clearance measured to the crown of the arch should normally be given as recommended in Table 4.

**8.2.3** In the case of drainage channels, where a bed rise due to progressive silting is anticipated, the permissible clearance specified in Table 4 should be increased to allow for such aggradations depending upon the extent of silting.

### 8.2.4 Free Board

On aqueduct structures, the free board is reckoned from the high flood level (including afflux) in case of drainage channel and from the full supply level in case of canals, to the formation level of guide bank or canal embankment. The free board should not be less than 900 mm. Wherever heavy wave actions are anticipated, the free board should be suitably increased.

## 8.3 Clearance for Superpassages

### 8.3.1 Clearance

Clearances of about fifty percent of those recommended in 8.2.1 and 8.2.2 *mutatis mutandis* may be provided in case of superpassages.

### 8.3.2 Free Board

Free board recommended in 8.2.4 may be provided.

## 8.4 Afflux

**8.4.1** The afflux to be adopted in the design should be that which would correspond to the design flood.

**8.4.2** The afflux should be restricted to such a value that the resulting velocity does not cause serious bed scour in the drainage or does not create submergence which cannot be permitted.

**8.4.3** The effect of afflux on the submergence of the surrounding country should be specially studied.

**8.4.4** The afflux may be calculated by either of the methods given at 8.4.4.1 and 8.4.4.2.

### 8.4.4.1 Rational formulae

Broad crested weir discharge formula or orifice discharge formula depending upon the flow conditions through the cross drainage work openings, may be applied for calculating afflux. When the performance of the cross drainage work openings remains unaffected by the depth downstream of the obstruction, that is, a standing wave is formed, weir formula is applicable, otherwise the orifice formula holds good. Approximately, when the downstream depth  $D_d$  above the crest is more than eighty percent of the upstream depth  $D_u$  the weir formula does not hold good.

a) Weir formula :

$$Q = 1.70 C_w LH^{3/2}$$

where

$Q$  = discharge through the openings in m<sup>3</sup>/s;

$C_w$  = coefficient of discharge accounting for losses in friction; the values may be taken as under :

Condition	Value
1) Narrow openings with or without floors	0.94
2) Wide openings with floors	0.96
3) Wide openings without floors	0.98

$L$  = linear waterway in m;

$H$  = total energy head upstream of the obstruction in m, that is,  $D_u + V^2/2g$ ;

$D_u$  = depth of flow upstream in m; and

Table 4 Minimum Clearances for Arch Openings

( Clauses 8.2.2 and 8.2.3 )

SI No. (1)	Arch Opening (2) m	Clearance (3)
i)	Less than 3	Rise or 0.8 m whichever is more
ii)	3 and above but less than 6	2/3 rise or 10 m whichever is more
iii)	6 and above but less than 21	2/3 rise or 1.25 m whichever is more
iv)	21 and above	2/3 rise or 1.5 m whichever is more

$v^2/2g$  = velocity head where  $v$  is the average velocity in the approach section worked out from the known width ( $W$ ) of unobstructed section.

$W$  = width of unobstructed section.

b) Orifice formula

$$Q = C_o [2g]^{1/2} L D_d \left[ \frac{h + (1 + e) v^2}{2g} \right]^{1/2}$$

where

$Q$  = discharge through the opening in  $m^3/s$ ,

$C_o$  = coefficient of discharge,

$g$  = acceleration due to gravity in  $m/s^2$ ,

$L$  = linear waterway in m,

$D_d$  = depth downstream of the obstruction in m,

$h$  = afflux in m,

$e$  = a factor accounting for recovery of some velocity as potential head on emergence from the cross drainage work openings, and

$v$  = average velocity in approach section in m/s.

The value of ' $C_o$ ' and ' $e$ ' to be adopted are given in Fig. 1 and 2. The afflux can be calculated knowing (a) the discharge, (b) the unobstructed width of the stream, and (c) the average depth downstream of the cross drainage work opening.

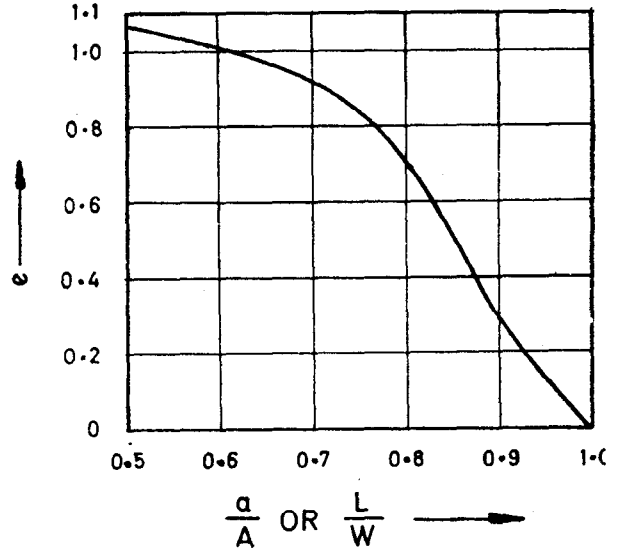


FIG. 2 COEFFICIENT 'e' IN THE ORIFICE FORMULA

If the value of  $V$  varies considerably in the unobstructed cross section of the drainage channel, as in the case of a drainage channel which spills over its banks,  $V$  for the purposes of this formula may be taken as the average velocity in the main channel and correspondingly the value of  $A$  should be determined by dividing the total discharge by  $V$ .

8.4.4.3 In case of readily erodable beds, full afflux as calculated from 8.4.4.1 or 8.4.4.2 may not occur.

8.5 Depth of Scour

8.5.1 Mean Depth of Scour

The mean depth of scour in metres below the check/high flood level may be calculated from the equation :

$$d_{sm} = 1.34 \left[ \frac{D_i^2}{K_{st}} \right]^{1/3}$$

where

$D_i$  = the discharge in cumecs per metre width. The value of  $D_i$  should be the maximum of the following:

- i) the design flood divided by the effective linear waterway between abutments or guide bunds, as the case may be.
- ii) The value obtained should take into account any concentration of flow through a portion of the waterway assessed from the study of the cross section of the drainage channel. Such modifications of the value may not be deemed applicable to minor cross drainage structures with overall waterway less than 60 m.
- iii) Actual observation, if any.

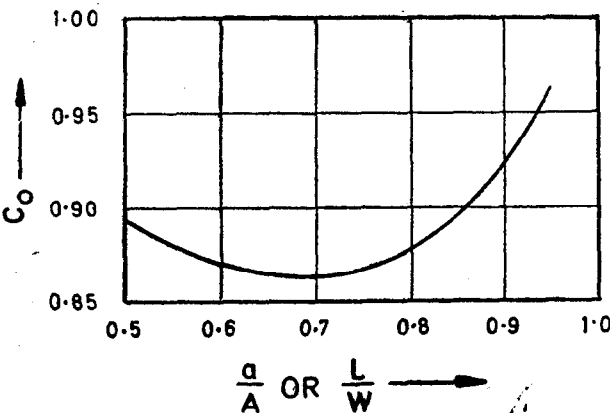


FIG. 1 COEFFICIENT ' $C_o$ ' IN THE ORIFICE FORMULA

8.4.4.2 Empirical formula

When the area of obstruction is not very large compared to the original unrestricted area, the following formula gives reasonably good results :

$$h = \left[ \frac{v^2}{17.85} + 0.0152 \right] \left[ \frac{A^2}{a^2} - 1 \right]$$

where

$h$  = afflux in m,

$V$  = velocity in the unobstructed drainage channel in m/s,

$A$  = the unobstructed sectional area of the drainage channel in  $m^2$ , and

$a$  = sectional area of the drainage channel provided in the construction in  $m^2$ .

$K_{sf}$  = the silt factor for representative sample of the bed material obtained up to the level of the deepest anticipated scour and given by the expression  $1.76 [d_m]^{1/2}$  'd<sub>m</sub>' being the weighted mean diameter in millimetres.

## NOTES

- 1  $d_m$  may be taken as the grain size at 50% passing from grain size distribution curve.
- 2 The above method of estimating  $d_{sm}$  is based on Lacey's theory for regime conditions in alluvial beds.

### 8.5.2 Maximum Depth of Scour for Design of Foundation

The maximum depth of scour below the Highest Flood Level (H.F.L.) at obstructions and configurations of the channel should be estimated from the value of 'd<sub>sm</sub>' on the following basis :

For the design of piers and abutments located in a straight reach and having individual foundations without any floor protection works :

- i) In the vicinity of piers  $2.00 d_{sm}$
- ii) Near abutments  $1.27 d_{sm}$  approach retained  
 $2.00 d_{sm}$  scour all around

For the design of floor protection works, for raft foundations or shallow foundations, the following scour values should be adopted:

- i) in a straight reach  $1.27 d_{sm}$
- ii) at a moderate bend  $1.50 d_{sm}$
- iii) at a severe bend  $1.75 d_{sm}$
- iv) at a right angled bend  $2.00 d_{sm}$

NOTE - The values of scour depth obtained as above may be suitably modified where actual observed data is available.

### 8.6 Loss of Head (Energy Loss)

When water flows through any structure there are head losses due to various factors mentioned in 8.6.1 to 8.6.4. The total loss of head occurring for a flow

is represented as the sum of these losses as applicable. Thus, if the total loss of head is denoted by  $H$  then :

$$H = h_1 + h_2 + h_3 + h_4$$

where

- $h_1$  = losses at the inlet and outlet (for syphon),
- $h_2$  = losses at elbows or bends (for barrel),
- $h_3$  = losses due to transitions (other than syphon), and
- $h_4$  = losses due to skin friction (for barrel and trough).

#### 8.6.1 Loss of Head at the Inlet and at the Outlet of Syphons

The formula for the losses at the entrance may be taken as:

$$h_1 = [1 + f_i] \frac{v^2}{2g}$$

where

- $h_1$  = loss of head at entrance or at exit in m;
- $f_i$  = a coefficient which provides for the loss of head on entry. It may be taken, for all practical design purposes, as 0.08 for a bell mouth entrance and as 0.505 for cylindrical entrance with sharp edges (unslapped mouth of the same sectional area of the barrel);
- $v$  = velocity in syphon in m/s; and
- $g$  = acceleration due to gravity in  $m/s^2$ .

#### 8.6.2 Loss of Head Due to Elbows or Bends in Barrels

The loss of head due to elbows or bends  $h_2$ , may be computed in accordance with the procedure given in IS 2951 (Part 2):1965.

8.6.3 Well designed inlet and outlet transitions are necessary at the upstream and downstream approaches of cross drainage works. Following estimates of losses in the transitions  $h_3$  generally hold for normal design and installation conditions. These are not applicable to syphons as for them this aspect is covered in 8.6.1.

These losses exclude losses covered by introduction of trash racks on upstream approaches.

#### 8.6.4 Loss of Head due to Skin Friction in the Barrels and Troughs

Sl No. Type of Transition

Losses

Sl No.	Type of Transition	Losses	
		Inlet	Outlet
1	Streamline warped	$0.1 \left\{ \frac{v_1^2 - v_2^2}{2g} \right\}$	$0.2 \left\{ \frac{v_1^2 - v_2^2}{2g} \right\}$
2	Straight warped	$0.2 \left\{ \frac{v_1^2 - v_2^2}{2g} \right\}$	$0.3 \left\{ \frac{v_1^2 - v_2^2}{2g} \right\}$
3	Straight warped with bottom corner fillets	$0.3 \left\{ \frac{v_1^2 - v_2^2}{2g} \right\}$	$0.4 \left\{ \frac{v_1^2 - v_2^2}{2g} \right\}$

where

- $v_1$  = velocity of flow before the transition in m/s,
- $v_2$  = velocity of flow after the transition in m/s, and
- $g$  = acceleration due to gravity in  $m/s^2$ .

**8.6.4.1** The loss of head due to skin friction in the barrels ' $h_4$ ' may be computed in accordance with the procedure given in IS 2951 (Part 1) : 1965.

**8.6.4.2** Loss of head due to friction in troughs  $h_4$  should be calculated by the Manning's formula namely:

$$v = \frac{1}{n} R^{2/3} S^{1/2}$$

where

$v$  = means velocity in m/s,

$R$  = hydraulic means radius in m,

$S$  = slope, and

$n$  = Manning's constant.

To choose the value of ' $n$ ' refer to IS 2912 : 1964. Depending upon the smoothness, hardness and rendering of surfaces of the structure (concrete, plaster or masonry, etc), planeness, workmanship and quality control the value of rugosity coefficient ' $n$ ' may be reduced for design purposes from the typical value, so as to achieve reliability in head loss estimates.

Manning's constant depends upon the characteristics of the material and the surface roughness. In absence of actual investigation or established norms being available, value of Manning's constant as given in Table 5 may be assumed.

**Table 5 Values of Manning's Coefficient**

Type of Surface Material (1)	Value of $n$	
	Range (2)	Normal Design Value (3)
<i>Concrete</i>		
1) Hard, smooth finish, troweled	0.011 to 0.014	0.013
2) Float finish	0.013 to 0.015	0.015
3) Unfinished (not properly floated)	0.015 to 0.022	0.020
4) Neat cement smooth finish	0.01 to 0.012	0.012
5) Steel shuttering finish	0.012 to 0.018	0.016
6) Wooden planks shuttering finish	0.014 to 0.020	0.018
7) Large panel plywood shuttering finish	0.013 to 0.016	0.016
8) Large panel smooth form finish, rich concrete (M30 grade and above) with joints ground smooth, and all defects rectified	0.011 to 0.014	0.013
9) Guniting (rough job)	0.018 to 0.025	0.022
10) Guniting (good plane job)	0.016 to 0.023	0.019
11) Smooth concrete surface with epoxy or polymer treatment	0.009 to 0.012	0.011
<i>Masonry</i>		
1) Glazed brick, good workmanship very fine joints	0.011 to 0.015	0.013
2) Good quality brick masonry in cement mortar	0.012 to 0.018	0.018
3) Rubble masonry in cement mortar	0.017 to 0.030	0.025
4) Dry rubble	0.023 to 0.035	0.032
5) Dressed ashlar masonry	0.013 to 0.018	0.016

## 8.7 Transition Walls

Transition walls as seen in plan, should at their ends, turn nearly at right angles to the flow in the channel and should extend for a minimum length of 0.6 m into the earth bank. Suitable pitching may be provided to the slopes, beyond the transition end.

## 8.8 Fluming Ratio

Except when dictated by conditions particular to a specific structure, a fluming ratio less than seventy

percent may not be adopted. For the purpose of computing the fluming ratio of canal, the width at mid depth may be taken as one hundred percent. In drainage channel when the course is undefined, a fluming ratio from seventy to ninety percent of the Lacey's waterway may be adopted.

## 8.9 Structure and Earth Work Connection

The earth mass in vicinity of the rigid structure is the connection between rigid structure and flexible earthwork. The rigid structure is non settling, relative

to the earthwork. The deflections, settlements and other movements in the rigid structure are comparatively very small. The rigid structure may consist of masonry, PCC, RCC, etc. The connection between rigid structures and earthwork is to be designed so as to reduce the differential settlement, and to avoid the possibility of formation of a separation (cleavage) between the two. The condition of connection between the rigid structure and the earth work affects the seepage, creep coefficient and piping and thus affects the stability of the earthwork.

For the connection, soil of proper qualities should be chosen. The method and the amount of compaction should be as required.

**8.9.1** The canal embankment adjoining the cross drainage structure should have adequate provisions to avoid possibility of any breach and to minimize seepage. The outer slope of the embankment should have a clear cover of 600 mm over the designed phreatic line (see IS 7894 : 1975) for the worst combination of design flood in natural drainage channel and annual low water level.

High earth banks (say over 5 m above ground) should be checked for stability of slopes and provision of rock-toe with filter should be made. Rip-rap or pitching should be done up to a level 0.5 m above HFL plus afflux as applicable (see IS 10751:1983, IS 11532:1985, IS 12094:1987, IS 8237:1985). For large drainage channel properly designed guide banks may be required.

**8.9.2** The water flow through various soil strata should be engineered. Flow net through earth work and foundation strata is to be estimated. Exit gradient of seepage water should be limited within the permissible limit.

Adequate foundation depth or cut-off or curtain walls may be provided of suitable depth so as to get safe exit gradient, which may be worked out in accordance with Khosla theory for two dimensional flow. In large structures three dimensional seepage flow may be considered for estimating exit gradient.

**8.9.2.1** The permissible creep coefficient (head loss per unit length) through soil may depend upon degree of compaction, whether it is refilled, actions at soil-structure connection or interface, relative movements between soil and rigid structure, probable settlements, etc.

Generally the permissible value of exit gradient for flow through different types of soils can be adopted as below :

Clay	1 in 4
Shingle	1 in 4 to 5
Coarse sand	1 in 5 to 6
Fine sand	1 in 6 to 7

**8.9.2.2** At entry end of seepage path, an allowance, as discount, should be assumed for settlement and inefficient maintenance, separation, cracking, etc. At exit end a discount or allowance should be assumed against erosion, scour or settlement. In absence of an estimate, the allowance may be 0.6 m high at entry point and

1 m at exit point. This allowance in height is the length over which creep coefficient is to be assumed as zero.

**8.9.2.3** From the plot of flow net, the differential design pressure (soil and hydraulic) on the rigid structure can be estimated.

**8.9.3** The bottom slabs of box (or barrel) or culverts should be checked for safety against the uplift force in a severe combination of forces chosen. Checks should consist of:

- a) safety against movement or flotation during construction and in service, and further
- b) check for design stresses with severe combination of uplift.

**8.9.3.1** For safety against flotation or movement, if required, the gravity loads can be increased by increasing thickness of members, providing additional concrete or masonry for weight, or anchoring the members into the foundation strata or deeper. The sum of downward equilibrating forces should be at least 1.2 times the upward buoyancy force. For checking the stress condition in the members, the dead loads or the downward equilibrating force (such as anchorage) should be reduced by dividing these by 1.2. Anchorages and parts of anchorage system should be checked for stresses under full load required for safety against floating.

**8.9.4** When flow is through multi barrel, at the upstream and downstream ends, stop-log grooves may be provided by extending the partition wall, so as to facilitate isolating one or more barrels for maintenance or repair. Ends of the partitions of multi-barrels should be provided with cut and ease water shapes so as to minimize the energy loss.

## 8.10 Abrasion Resistance

Structural members in the bed of the flow should be safe against abrasion loss. Depending on the velocity of flow and the abrasion causing debris (stone gravel, sand silt, etc) it may hold, the structural member in the bed should be hard enough and of sufficiently high strength or it should be given a treatment or wearing coat to enhance the abrasion resistance. Fitching of heavy weight stones, stone masonry or high grade concrete overlays may be provided.

Apart from the bed of flow, the members on the sides may also be subjected to abrasion, though the material causing abrasion may be less effective on the sides than at the bottom. Hence due consideration for durability of sides, alongwith the flow should be given.

## 9 FOUNDATION

**9.1** Foundations of a cross drainage work should be designed to satisfy the requirements of allowable bearing capacity of the foundation strata under critical loads including positive pressure conditions (i.e. no uplift or tension), seismic effects, anticipated scour and settlement.

**9.1.1** The sub grade at the foundation level for known shape and size of foundations, depth below ground level, expected sub-soil water level and engineering

properties should be safe in bearing capacity. Comparatively lower pressures are allowed on foundations on sub-grades prone to appreciable settlement.

**9.1.2** As far as possible, the foundation should bear on homogeneous, undisturbed and uniform sub-grade of fairly dense type. Where foundations have to be provided on sub-grade of different types suitable joints should be provided to avoid cracks due to differential settlement, the tolerance limit has to be evaluated for each case.

**9.1.3** The permissible maximum differential settlement of the foundation strata estimated should not exceed 1 in 400. In case of structures sensitive to differential settlement, the tolerance limit has to be evaluated for each case.

**9.1.4** When the seismic effect is considered, higher bearing capacity may be adopted in accordance with IS 1893 : 1984.

**9.1.5** The foundations should be taken sufficiently deep to secure firm strata from considerations of settlement, overall stability and avoidance of undermining due to erosion. The depth of foundation of various members should be such that these are safe against scour or are protected against it. If sound rock is met with, at the higher levels than the anticipated scour, scour criteria will not be applicable. Tension (i.e. negative contact pressure) can be allowed only if foundation strata consists of hard rock, however, such negative contact pressure should be neglected in the design calculations.

**9.1.6** Maximum depth of scour should be computed for stream as in 8.5 from check high flood level (CHFL). Either the foundation or cut-off wall if provided, under the foundation should be taken to a depth 1.333 times the scour depth estimated below CHFL or 1.05 times the scour depth estimated for probable maximum flood (PMF). Either depth of foundation, or depth of cut-off if provided, should also be governed by permissible gradient of seepage water in 8.9.2. In case of canal having erodable bottom (i.e. unlined) similar checks should be done for full supply discharge.

**9.1.7** Where concrete or masonry floor is provided under the works, scour condition is not applicable and the foundations are usually taken to about 1.5 m below the floor levels with suitable cut off for the concrete or masonry floors. However where such a floor is not provided, foundations are taken to provide a margin below the anticipated scour level (usually called grip length) of about 0.33 times the maximum depth of scour.

## 10 MODEL STUDIES

**10.1** Owing to a number of complex factors in the design of hydraulic structures and specially when the designs are based on empirical formulae, adequate answers cannot be obtained through analytical methods only. Therefore, it would be in the best interest, if the designs for major cross drainage works are first

tested on models. These studies should *inter alia*, taken into account the impact of ancillary components of the structure, namely, the approaches, end connections, afflux bunds, floors, protection arrangements and any upstream or downstream structures on either the canal or the drainage channel.

## 11 MISCELLANEOUS DETAILS

### 11.1 Waterstops

Waterstops, also referred to as water seals, are generally of three types, namely : (a) rubber water seals, (b) metal water seals, and (c) synthetic material seals. The waterstops are used in and across all joints where leakages are detrimental to structural safety or the water needs are to be conserved. The locations where waterstops are provided in various types of cross drainage works are described below:

- a) *Aqueduct* — In R.C.C. through side walls and bottom slab over each pier in a continuous length and at the junction of transition and R.C.C. trough, both in the floor and wing walls.
- b) *Syphon* — At expansion joints and at the junction of each of the sloping limbs in a continuous form and at the junction of the transition walls and floors with the barrel, both at the entry and exit in a continuous form.
- c) *Superpassage* — At the junction between the drainage trough wing walls, namely, trough wall of R.C.C. and wing wall of masonry and all the expansion joints in a continuous length.

### 11.2 Weep Holes

Weep holes are small openings in the retaining walls, like wings (i.e. transitions of natural stream). These are to facilitate the drainage of backfills and avoid build up of pressure. Weep holes may be provided above the flow net line of zero water pressure, under the condition of canal flowing full and natural stream with lowest annual flow.

Weep holes if provided, should have filters with graded material suitably provided to avoid piping of earth fill behind the wall and also to avoid choking of the holes.

The provision of weep holes should be so, as to not render the creep coefficient of seepage unsafe, and, should also not contribute to enhanced loss of canal water.

### 11.3 Bearings

For safe transfer of load from superstructure to sub-structure suitable bearings should be provided between the trough bottom and pier abutment to cater for the various movements occurring in the superstructure under different combinations of load.

**ANNEX A**  
( Clause 2.1 )

**LIST OF REFERRED INDIAN STANDARDS**

<i>IS No.</i>	<i>Title</i>	<i>IS No.</i>	<i>Title</i>
1893 : 1984	Criteria for earthquake resistant design of structures ( <i>fourth revision</i> )	4410 (Part 15/ Sec 5) : 1992	Glossary of terms relating to river valley projects : Part 15 Canal structures, Section 5 Cross drainage works ( <i>first revision</i> )
2912 : 1964	Recommendations for liquid flow measurement in open channels by slope area methods (approximate methods)	5477 (Part 4) : 1971	Method for fixing the capacities of reservoirs : Part 4 Flood storage
2951 (Part 1) : 1965	Recommendations for estimation of flow of liquids in closed conduits : Part 1 Head loss in straight pipes due to friction resistance.	7894 : 1975	Code of practice for stability analysis of earth dams
2951 (Part 2) : 1965	Recommendations for estimation of flow of liquids in closed conduits : Part 2 Head loss in pipes and fittings.	8237 : 1985	Code of practice for protection of slope for reservoir embankments ( <i>first revision</i> )
4410 (Part 11/Sec 5) : 1977	Glossary of terms relating to river valley projects : Part 11 Hydrology, Section 5 Floods	10751 : 1983	Criteria for design of guide banks for alluvial rivers
		11532 : 1985	Guidelines for construction of river embankments (levee)
		12094 : 1987	Guidelines for planning and design of river embankments (levees)



### **Standard Mark**

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

## Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

### Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director ( Publications ), BIS.

### Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards Monthly Additions'. Comments on this Indian Standard may be sent to BIS giving the following reference:

Doc : No. RVD 17 ( 56 )

### Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

## BUREAU OF INDIAN STANDARDS

### Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002  
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha  
( Common to all offices )

### Regional Offices :

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg  
NEW DELHI 110002

Telephone

{ 331 01 31  
{ 331 13 75

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola  
CALCUTTA 700054

{ 37 84 99, 37 85 61  
{ 37 86 26, 37 86 62

Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036

{ 53 38 43, 53 16 40  
{ 53 23 84

Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113

{ 235 02 16, 235 04 42  
{ 235 15 19, 235 23 15

Western : Manakalaya, E9 MIDC, Marol, Andheri ( East )  
BOMBAY 400093

{ 632 92 95, 632 78 58  
{ 632 78 91, 632 78 92

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR.  
COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD.  
JAIPUR. KANPUR. LUCKNOW. PATNA. THIRUVANANTHAPURAM.